



K系列斜齿轮-螺旋锥齿轮减速机
K Helical-bevel gear units


GELUFU

格鲁夫机械设备制造有限公司
Gelufu Machinery Equipment Manufacturing Co. Ltd



K系列减速机有以下设计方案：


K series gear units are available in the following designs:

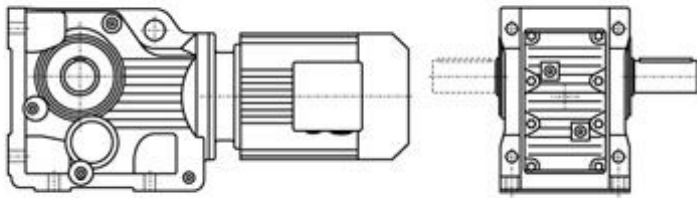

K..Y..

底脚轴伸式安装螺旋锥齿轮减速机


Foot-mounted helical-bevel gear units with solid shaft

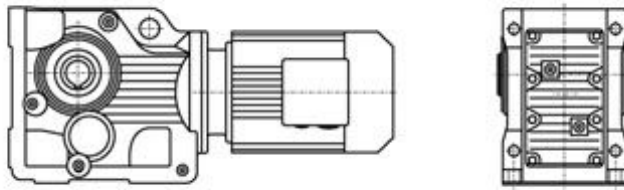

KAB...Y..

底脚空心轴安装螺旋锥齿轮减速机


Foot-mounted helical-bevel gear units with hollow shaft

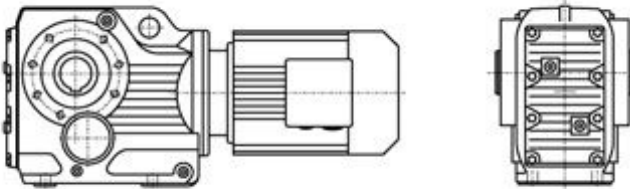

KA...Y..

空心轴安装螺旋锥齿轮减速机


Helical-bevel gear units with hollow shaft

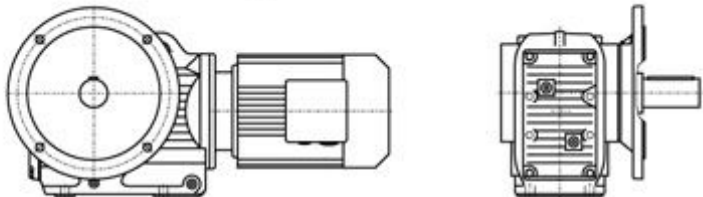

KF...Y..

法兰轴伸式安装螺旋锥齿轮减速机


Flange-mounted helical-bevel gear units with solid shaft

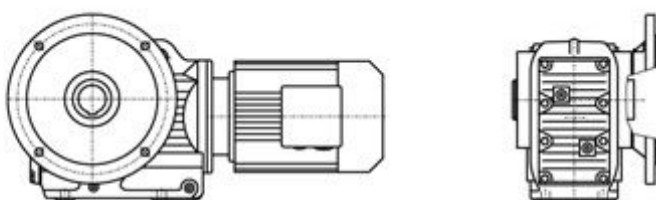

KAF...Y..

法兰空心轴安装螺旋锥齿轮减速机


Flange-mounted helical-bevel gear units with hollow shaft

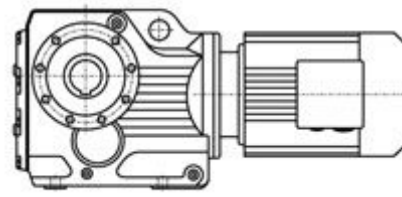

KAZ...Y..

小法兰空心轴安装螺旋锥齿轮减速机


Short-flange-mounted helical-bevel gear units with hollow shaft



KAT...Y..

带防转臂空心轴安装螺旋锥齿轮减速机


Torque-arm-mounted helical-bevel gear units with hollow shaft



K (KF、KA、KAF、KAB、KAZ) S...

轴输入的螺旋锥齿轮减速机


Shaft input helical-bevel gear units

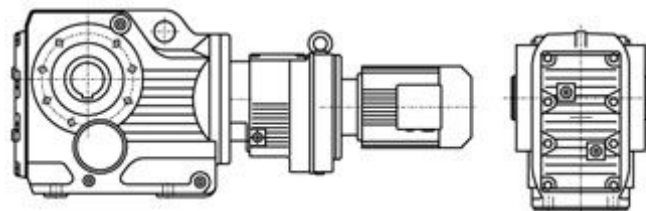

KA (K、KF、KAF、KAB、KAZ) ...R...Y...

组合式螺旋锥齿轮减速机


Combinatorial helical-bevel gear units

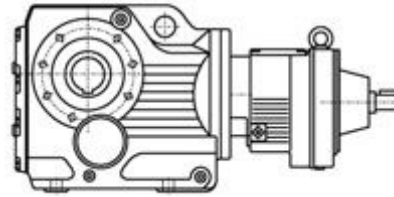

KA (K、KF、KAF、KAB、KAZ) S...R...

轴输入的组式螺旋锥齿轮减速机

Shaft input combinatorial helical-bevel gear units



KA (K、KF、KAF、KAB、KAZ) ...Y...

电机用户自配或配特殊电机时需加联接法兰

When equipping the user's motor or the special one, the flange is required to be connected




型号与标记:

Type Designations:


K F 37-Y 0.55-4P-24.99-M1-180°-A 减速机类型 结构形式 机座号 电机代号 电机功率、极数 传动比 安装形式 电机接线盒位置 输出轴或法兰方向	K F 37-Y 0.55-4P-24.99-M1-180°-A Gear units type Structure Size Motor code Motor power, pole Ratio Mounting position Position of the motor thermal box Position of output shaft or flange																																												
减速机类型: 斜齿-螺旋锥齿轮减速机	Gear units type: Helical-bevel gear units																																												
结构形式: <table><tr><td>普通轴伸式 (省略)</td><td></td></tr><tr><td>轴装式</td><td>A</td></tr><tr><td>轴伸法兰式</td><td>F</td></tr><tr><td>轴装法兰式</td><td>AF</td></tr><tr><td>轴装小法兰式</td><td>AZ</td></tr><tr><td>轴装底脚式</td><td>AB</td></tr><tr><td>轴装带防转臂</td><td>AT</td></tr><tr><td>普通轴伸式, 轴输入</td><td>S</td></tr><tr><td>普通轴装式, 轴输入</td><td>AS</td></tr><tr><td>轴伸法兰式, 轴输入</td><td>FS</td></tr><tr><td>轴装法兰式, 轴输入</td><td>AFS</td></tr></table>	普通轴伸式 (省略)		轴装式	A	轴伸法兰式	F	轴装法兰式	AF	轴装小法兰式	AZ	轴装底脚式	AB	轴装带防转臂	AT	普通轴伸式, 轴输入	S	普通轴装式, 轴输入	AS	轴伸法兰式, 轴输入	FS	轴装法兰式, 轴输入	AFS	Structure: <table><tr><td>Foot-mounted solid shaft output</td><td>(-)</td></tr><tr><td>Hollow shaft output</td><td>A</td></tr><tr><td>Flange-mounted solid shaft output</td><td>F</td></tr><tr><td>Flange-mounted hollow shaft output</td><td>AF</td></tr><tr><td>Short-flange-mounted hollow shaft output</td><td>AZ</td></tr><tr><td>Foot-mounted hollow shaft output</td><td>AB</td></tr><tr><td>Torque-arm-mounted hollow shaft output</td><td>AT</td></tr><tr><td>Foot-mounted solid shaft output, shaft input</td><td>S</td></tr><tr><td>Hollow shaft output, shaft input</td><td>AS</td></tr><tr><td>Flange-mounted solid shaft output, shaft input</td><td>FS</td></tr><tr><td>Flange-mounted hollow shaft output, shaft input</td><td>AFS</td></tr></table>	Foot-mounted solid shaft output	(-)	Hollow shaft output	A	Flange-mounted solid shaft output	F	Flange-mounted hollow shaft output	AF	Short-flange-mounted hollow shaft output	AZ	Foot-mounted hollow shaft output	AB	Torque-arm-mounted hollow shaft output	AT	Foot-mounted solid shaft output, shaft input	S	Hollow shaft output, shaft input	AS	Flange-mounted solid shaft output, shaft input	FS	Flange-mounted hollow shaft output, shaft input	AFS
普通轴伸式 (省略)																																													
轴装式	A																																												
轴伸法兰式	F																																												
轴装法兰式	AF																																												
轴装小法兰式	AZ																																												
轴装底脚式	AB																																												
轴装带防转臂	AT																																												
普通轴伸式, 轴输入	S																																												
普通轴装式, 轴输入	AS																																												
轴伸法兰式, 轴输入	FS																																												
轴装法兰式, 轴输入	AFS																																												
Foot-mounted solid shaft output	(-)																																												
Hollow shaft output	A																																												
Flange-mounted solid shaft output	F																																												
Flange-mounted hollow shaft output	AF																																												
Short-flange-mounted hollow shaft output	AZ																																												
Foot-mounted hollow shaft output	AB																																												
Torque-arm-mounted hollow shaft output	AT																																												
Foot-mounted solid shaft output, shaft input	S																																												
Hollow shaft output, shaft input	AS																																												
Flange-mounted solid shaft output, shaft input	FS																																												
Flange-mounted hollow shaft output, shaft input	AFS																																												
规格: (见选型参数表)	Size: (see selection table)																																												
电机代号: <table><tr><td>普通 (更新)</td><td>Y(Y2)</td></tr><tr><td>防 爆</td><td>B</td></tr><tr><td>直 流</td><td>Z</td></tr><tr><td>制 动</td><td>YEJ</td></tr><tr><td>多 速</td><td>D</td></tr><tr><td>变 频</td><td>YVP</td></tr><tr><td>电磁调速</td><td>YCT</td></tr><tr><td>冶金起重</td><td>R</td></tr><tr><td>变频制动</td><td>YVPJ</td></tr><tr><td>辊 道</td><td>G</td></tr></table>	普通 (更新)	Y(Y2)	防 爆	B	直 流	Z	制 动	YEJ	多 速	D	变 频	YVP	电磁调速	YCT	冶金起重	R	变频制动	YVPJ	辊 道	G	Motor code: <table><tr><td>Ordinary(renew)</td><td>Y(Y2)</td></tr><tr><td>Flame-proof</td><td>B</td></tr><tr><td>Direct current</td><td>Z</td></tr><tr><td>Brake</td><td>YEJ</td></tr><tr><td>Multi-speed</td><td>D</td></tr><tr><td>Variable frequency</td><td>YVP</td></tr><tr><td>Electromagnetism speed modulation</td><td>YCT</td></tr><tr><td>Hoisting in metallurgy</td><td>R</td></tr><tr><td>Variable frequency and brake</td><td>YVPJ</td></tr><tr><td>Roller tables</td><td>G</td></tr></table>	Ordinary(renew)	Y(Y2)	Flame-proof	B	Direct current	Z	Brake	YEJ	Multi-speed	D	Variable frequency	YVP	Electromagnetism speed modulation	YCT	Hoisting in metallurgy	R	Variable frequency and brake	YVPJ	Roller tables	G				
普通 (更新)	Y(Y2)																																												
防 爆	B																																												
直 流	Z																																												
制 动	YEJ																																												
多 速	D																																												
变 频	YVP																																												
电磁调速	YCT																																												
冶金起重	R																																												
变频制动	YVPJ																																												
辊 道	G																																												
Ordinary(renew)	Y(Y2)																																												
Flame-proof	B																																												
Direct current	Z																																												
Brake	YEJ																																												
Multi-speed	D																																												
Variable frequency	YVP																																												
Electromagnetism speed modulation	YCT																																												
Hoisting in metallurgy	R																																												
Variable frequency and brake	YVPJ																																												
Roller tables	G																																												
电机功率、极数: (见选型参数表)	Motor power, pole : (see selection table)																																												
传动比: (见选型参数表)	Ratio: (see selection table)																																												
安装形式: M1、M2、M3、M4、M5、M6 (见第89页)	Mounting position: M1、M2、M3、M4、M5、M6(see page 89)																																												
电机接线盒位置: 0°、90°、180°、270° (见第89页)	Position of the motor thermal box: 0°、90°、180°、270° (see page 89)																																												
输出轴或法兰方向: 从电机尾部看左边为 A 从电机尾部看右边为 B (见安装形式) 从电机尾部看左右边为 A+B	Position of output shaft or flange: viewing on motor end:left side -A, right side-B,both sides-A+B(see mounting position)																																												

安装形式 Mounting position

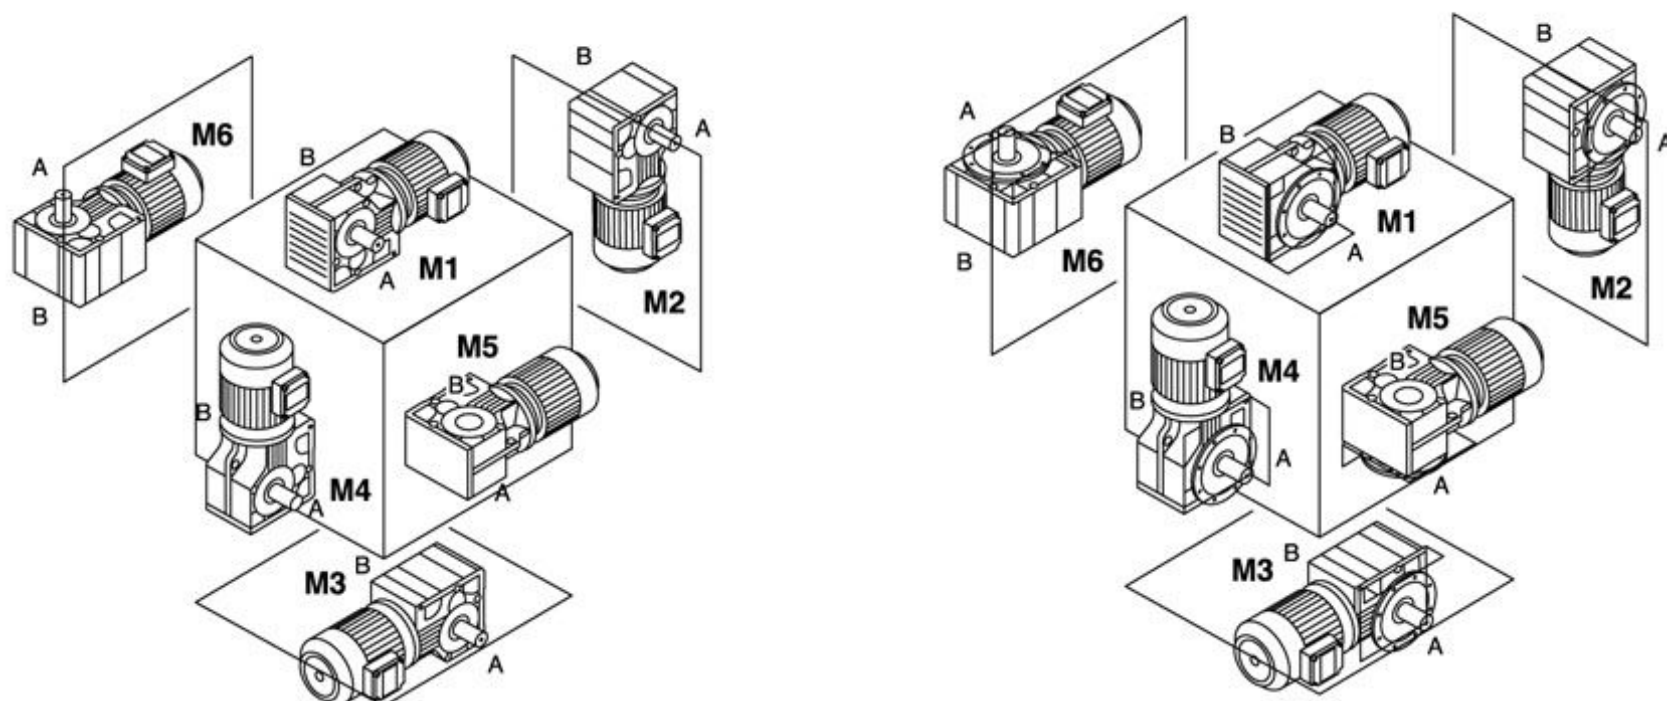

K

电机接线盒位置 Position of the motor thermal box

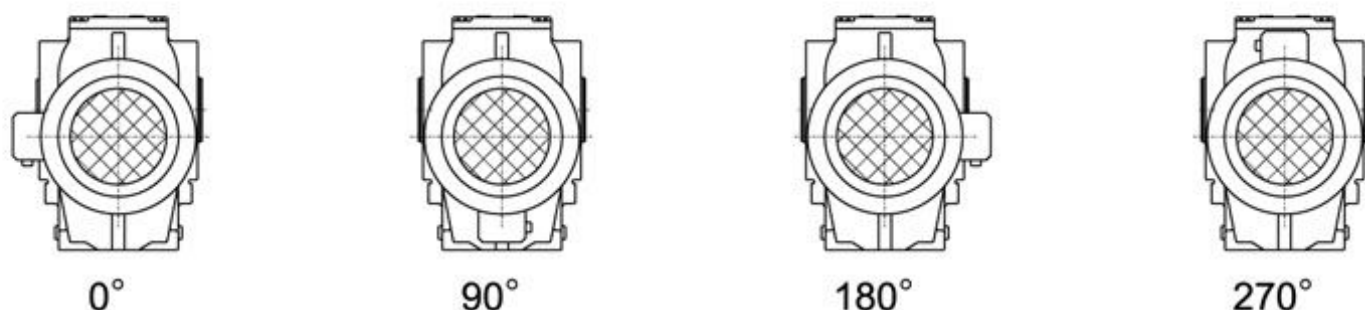

输入功率及许用转矩 Input power rating and permissible torque

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
结构形式 Structure	K KA KF KAF KAZ KAT KAB											
输入功率 Input power rating(kw)	0.18~3.0	0.18~3.0	0.18~5.5	0.18~5.5	0.37~11	0.75~22	1.1~30	3~45	7.5~90	11~160	11~200	18.5~200
传动比 Ratio	5.36~106.38	5.81~131.87	6.57~145.14	7.14~144.79	7.24~192.18	7.19~197.37	8.95~176.05	8.74~141.46	8.68~146.07	12.65~150.41	17.28~163.91	17.27~180.78
许用转矩 (N.m) Permissible torque	200	400	600	820	1550	2700	4300	8000	13000	18000	32000	50000

减速机重量 Gear unit weight

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
重量 (kg) Weight	11	20	27	33	57	85	130	250	380	610	1015	1700

所注重量为平均值, 仅供参考
The weights are mean values, only for reference.

润滑油量表

Lubrication table

K...,KAB...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.3	1	1
K..47	0.8	1.3	1.5	2	1.6	1.6
K..57	1.2	2.3	2.5	3	2.6	2.4
K..67	1.1	2.4	2.6	3.4	2.6	2.6
K..77	2.2	4.1	4.4	5.9	4.2	4.4
K..87	3.7	8	8.7	10.9	7.8	8
K..97	7	14	15.7	20	15.7	15.5
K..107	10	21	25.5	33.5	24	24
K..127	21	41.5	44	54	40	41
K..157	31	62	65	90	58	62
K..167	35	100	100	125	85	85
K..187	60	170	170	205	130	130

K

KF...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
KF37	0.5	1.1	1.1	1.5	1	1
KF47	0.8	1.3	1.7	2.2	1.6	1.6
KF57	1.3	2.3	2.7	3	2.9	2.7
KF67	1.1	2.4	2.8	3.6	2.7	2.7
KF77	2.1	4.1	4.4	6	4.5	4.5
KF87	3.7	8.2	9	11.9	8.4	8.4
KF97	7	14.7	17.3	21.5	15.7	16.5
KF107	10	22	26	35	25	25
KF127	21	41.5	46	55	41	41
KF157	31	66	69	92	62	62

KA..、KAF..、KAZ...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.4	1	1
K..47	0.8	1.3	1.6	2.1	1.6	1.6
K..57	1.3	2.3	2.7	3	2.9	2.7
K..67	1.1	2.4	2.7	3.6	2.6	2.6
K..77	2.1	4.1	4.6	6	4.4	4.4
K..87	3.7	8.2	8.8	11.1	8	8
K..97	7	14.7	15.7	20	15.7	15.7
K..107	10	20.5	24	32	24	24
K..127	21	41.5	43	52	40	40
K..157	31	66	67	87	62	62
KA..167	35	100	100	125	85	85
KA..187	60	170	170	205	130	130



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
0.18kW					
0.09	16482	14975	0.74		
0.11	13692	12440	0.89		
0.13	12013	10914	1.0		
0.14	10807	9819	1.1		
0.16	9293	8443	1.3	K 127R77	4
0.19	8236	7483	1.5	KF 127R77	4
0.21	7226	6565	1.7	KA 127R77	4
0.24	6388	5804	1.9	KAF127R77	4
0.28	5533	5027	2.2		
0.31	4868	4423	2.5		
0.37	4184	3801	2.9		
0.43	3563	3237	3.4		
0.17	9037	8211	0.8		
0.19	7888	7167	1.0		
0.23	6711	6097	1.1		
0.25	6144	5582	1.2		
0.27	5575	5065	1.3	K 107R77	4
0.32	4732	4299	1.6	KF 107R77	4
0.37	4135	3757	1.8	KA 107R77	4
0.43	3562	3236	2.1	KAF107R77	4
0.48	3158	2869	2.4		
0.56	2756	2504	2.7		
0.63	2425	2203	3.1		
0.30	5139	4669	0.79		
0.34	4493	4082	0.90		
0.39	3944	3583	1.0		
0.45	3421	3108	1.2		
0.50	3035	2757	1.3		
0.57	2662	2419	1.5		
0.65	2337	2123	1.7	K 97R57	4
0.75	2043	1856	2.0	KF 97R57	4
0.86	1789	1625	2.3	KA 97R57	4
0.97	1574	1430	2.6	KAF97R57	4
1.1	1388	1261	2.9		
1.3	1213	1102	3.3		
1.5	1053	957	3.8		
1.6	941	855	4.3		
1.9	818	743	4.9		
2.1	717	651	5.6		
0.45	3420	3107	0.74		
0.51	3003	2728	0.85		
0.59	2610	2371	0.97		
0.67	2298	2088	1.1		
0.75	2041	1854	1.2	K 87R57	4
0.84	1825	1658	1.4	KF 87R57	4
1.0	1557	1415	1.6	KA 87R57	4
1.1	1353	1229	1.9	KAF87R57	4
1.3	1187	1078	2.1		
1.5	1047	951	2.4		
1.7	921	837	2.8		
1.9	799	726	3.2		
0.9	1666	1514	0.9		
1.0	1528	1388	1.0		
1.1	1341	1218	1.1		
1.3	1159	1053	1.3	K 77R37	4
1.5	1017	924	1.4	KF 77R37	4
1.7	897	815	1.6	KA 77R37	4
2.0	780	709	1.9	KAF77R37	4
2.2	685	622	2.1		
2.5	608	552	2.4		
2.9	534	485	2.7		
3.2	471	428	3.1		
3.8	404	367	3.6		
0.18kW					
1.5	994	903	0.78		
1.8	873	793	0.88		
2.0	767	697	1.0		
2.3	675	613	1.1	K 67R37	4
2.6	597	542	1.3	KF 67R37	4
3.0	518	471	1.5	KA 67R37	4
3.3	462	420	1.7	KAF67R37	4
3.9	397	361	1.9		
4.3	356	323	2.2		
5.1	299	272	2.6		
2.3	677	615	0.8		
2.6	599	544	0.9		
2.9	521	473	1.1		
3.3	463	421	1.2		
3.8	398	362	1.4	K 57R37	4
4.4	351	319	1.6	KF 57R37	4
5.1	300	273	1.9	KA 57R37	4
5.8	264	240	2.1	KAF57R37	4
6.5	237	215	2.4		
7.2	211	192	2.7		
8.4	183	166	3.1		
3.7	413	375	0.9		
4.3	359	326	1.0		
4.8	318	289	1.2		
5.6	275	250	1.4	K 47R37	4
6.2	248	225	1.5	KF 47R37	4
7.0	218	198	1.7	KA 47R37	4
8.3	184	167	2.0	KAF47R37	4
9.3	164	149	2.3		
11	141	128	2.7		
6.8	226	205	0.83	K 37R17	4
7.7	199	181	0.94	KF 37R17	4
8.7	176	160	1.07	KA 37R17	4
10	150	136	1.26	KAF37R17	4
11	140	127	1.34		
5.9	275	144.79	2.8	K 67	6
6.9	235	123.54	3.3	KF 67	6
7.9	205	108.03	3.8	KA 67	6
8.3	195	102.62	4.0	KAF67	6
9.6	168	144.79	4.6	K 67	4
11	144	123.54	5.4	KF 67	4
13	126	108.03	6.1	KA 67	4
				KAF67	4
5.9	276	145.14	2.0	K 57	6
6.9	235	123.85	2.4	KF 57	6
7.8	206	108.29	2.7	KA 57	6
8.3	196	102.88	2.9	KAF57	6
9.4	172	90.26	3.3		
9.6	169	145.14	3.3		
11	144	123.85	3.9	K 57	4
13	126	108.29	4.5	KF 57	4
14	120	102.88	4.7	KA 57	4
15	105	90.26	5.4	KAF57	4
18	89	76.56	6.3		
6.4	251	131.87	1.50	K 47	6
7.0	231	121.48	1.63	KF 47	6
8.1	198	104.37	1.90	KA 47	6
9.4	173	90.86	2.2	KAF47	6
10	162	85.12	2.3		

K



选型参数表 Selection Table

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机型号 Type Type	极数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机型号 Type Type	极数 Pole p
0.18kW						0.25kW					
11	153	131.87	2.5	K 47	4	0.86	2484	1625	1.6		
12	141	121.48	2.7	KF 47	4	1.0	2186	1430	1.8	K 97R57	4
13	121	104.37	3.1	KA 47	4	1.1	1928	1261	2.1	KF 97R57	4
15	106	90.86	3.6	KAF47	4	1.3	1685	1102	2.4	KA 97R57	4
16	99	85.12	3.8			1.5	1463	957	2.8	KAF97R57	4
						1.6	1307	855	3.1		
8.0	202	106.38	0.93	K 37	6	0.7	3192	2088	0.80		
8.7	186	97.81	1.01	KF 37	6	0.7	2834	1854	0.90		
10	159	83.69	1.18	KA 37	6	0.8	2535	1658	1.0	K 87R57	4
12	138	72.54	1.36	KAF37	6	1.0	2163	1415	1.2	KF 87R57	4
						1.1	1879	1229	1.4	KA 87R57	4
13	124	106.38	1.52			1.3	1648	1078	1.5	KAF87R57	4
14	114	97.81	1.65			1.5	1454	951	1.7		
17	97	83.69	1.93			1.7	1280	837	2.0		
19	84	72.54	2.2			1.9	1110	726	2.3		
21	79	67.80	2.4			2.2	975	638	2.6		
24	68	58.60	2.8								
28	58	49.79	3.2			1.3	1610	1053	0.9		
31	52	44.46	3.6			1.5	1413	924	1.0		
37	44	37.97	4.3			1.7	1246	815	1.2		
39	41	35.57	4.5	K 37	4	2.0	1084	709	1.3		
46	35	29.96	5.4	KF 37	4	2.2	951	622	1.5		
48	34	28.83	5.6	KA 37	4	2.5	844	552	1.7	K 77R37	4
56	29	24.99	6.5	KAF37	4	2.9	741	485	2.0	KF 77R37	4
60	27	23.36	6.7			3.2	654	428	2.2	KA 77R37	4
69	23	20.19	7.4			3.9	547	358	2.7	KAF77R37	4
81	20	17.15	8.5			4.3	489	320	3.0		
91	18	15.31	9.2			4.9	433	283	3.4		
106	15	13.08	10			5.7	376	246	3.9		
114	14	12.14	11			6.4	330	216	4.4		
133	12	10.49	12			7.3	292	191	5.0		
156	10	8.91	15			8.2	260	170	5.6		
175	9	7.96	16								
0.25kW						0.25kW					
0.14	15010	9819	0.81			2.3	937	613	0.8		
0.16	12907	8443	0.95			2.6	829	542	0.9		
0.19	11438	7482	1.07	K 127R77	4	3.0	720	471	1.1	K 67R37	4
0.21	10036	6565	1.2	KF 127R77	4	3.3	642	420	1.2	KF 67R37	4
0.24	8872	5804	1.4	KA 127R77	4	3.9	552	361	1.4	KA 67R37	4
0.28	7685	5027	1.6	KAF127R77	4	4.3	494	323	1.6	KAF67R37	4
0.31	6761	4423	1.8			5.1	416	272	1.9		
0.37	5811	3801	2.1			5.8	367	240	2.1		
0.43	4948	3237	2.5			6.4	332	217	2.3		
0.23	9320	6097	0.81			3.3	644	421	0.9		
0.25	8533	5582	0.88			3.8	553	362	1.0		
0.27	7743	5065	1.0			4.4	488	319	1.2		
0.32	6572	4299	1.1			5.1	417	273	1.4		
0.37	5743	3757	1.3			5.8	367	240	1.5	K 57R37	4
0.43	4947	3236	1.5	K 107R77	4	6.5	329	215	1.7	KF 57R37	4
0.48	4386	2869	1.7	KF 107R77	4	7.2	294	192	1.9	KA 57R37	4
0.56	3828	2504	2.0	KA 107R77	4	8.4	254	166	2.2	KAF57R37	4
0.63	3368	2203	2.2	KAF107R77	4	9.9	216	141	2.6		
0.74	2857	1869	2.6			11	193	126	2.9		
0.82	2582	1689	2.9			13	165	108	3.4		
0.91	2343	1533	3.2			15	145	95	3.9		
1.06	2013	1317	3.7								
0.45	4751	3108	0.9	K 97R57	4	4.2	536	154.02	2.7	K 77	8
0.50	4215	2757	1.0	KF 97R57	4	4.8	471	135.28	3.1	KF 77	8
0.57	3698	2419	1.1	KA 97R57	4	5.0	447	128.52	3.3	KA 77	8
0.65	3245	2123	1.2	KAF97R57	4	5.7	395	113.56	3.7	KAF77	8
0.75	2837	1856	1.4			4.4	507	192.18	2.9	K 77	6
						4.7	474	179.37	3.1	KF 77	6
						5.5	407	154.02	3.6	KA 77	6
						6.3	357	135.28	4.1	KAF77	6



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
0.25kW						0.37kW					
5.2	430	123.54	1.8	K 67	8	0.19	16930	7483	0.72		
6.0	376	108.03	2.1	KF 67	8	0.21	14853	6565	0.82		
6.3	357	102.62	2.2	KA 67	8	0.24	13131	5804	0.93	K 127R77	4
7.2	313	90.04	2.5	KAF67	8	0.28	11373	5027	1.07	KF 127R77	4
						0.31	10007	4423	1.22	KA 127R77	4
5.9	382	144.79	2.0	K 67	6	0.37	8600	3801	1.42	KAF127R77	4
6.9	326	123.54	2.4	KF 67	6	0.43	7324	3237	1.67		
7.9	285	108.03	2.7	KA 67	6	0.72	4357	1926	2.80		
8.3	271	102.62	2.8	KAF67	6	0.79	3975	1757	3.07		
						0.90	3486	1541	3.51		
9.6	234	144.79	3.3	K 67	4	0.37	8500	3757	0.88		
11	199	123.54	3.9	KF 67	4	0.43	7321	3236	1.03		
13	174	108.03	4.4	KA 67	4	0.48	6491	2869	1.16		
14	166	102.62	4.7	KAF67	4	0.56	5665	2504	1.33	K 107R77	4
5.9	383	145.14	1.5	K 57	6	0.63	4984	2203	1.51	KF 107R77	4
6.9	327	123.85	1.7	KF 57	6	0.74	4229	1869	1.78	KA 107R77	4
7.8	286	108.29	2.0	KA 57	6	0.82	3821	1689	1.97	KAF107R77	4
8.3	272	102.88	2.1	KAF57	6	0.91	3468	1533	2.2		
9.4	238	90.26	2.4			1.06	2980	1317	2.5		
11	202	76.56	2.8			1.21	2602	1150	2.9		
9.6	234	145.14	2.4	K 57	4	0.65	4803	2123	0.84		
11	200	123.85	2.8	KF 57	4	0.75	4199	1856	0.96		
13	175	108.29	3.2	KA 57	4	0.86	3676	1625	1.10		
14	166	102.88	3.4	KAF57	4	0.97	3235	1430	1.25	K 97R57	4
15	146	90.26	3.9			1.1	2853	1261	1.42	KF 97R57	4
18	124	76.56	4.6			1.3	2493	1102	1.62	KA 97R57	4
6.4	348	131.87	1.08	K 47	6	1.5	2165	957	1.87	KAF97R57	4
7.0	321	121.48	1.17	KF 47	6	1.6	1934	855	2.1		
8.1	276	104.37	1.36	KA 47	6	1.9	1681	743	2.4		
9.4	240	90.86	1.57	KAF47	6	2.1	1473	651	2.7		
10	225	85.12	1.67			2.4	1296	573	3.1		
11	213	131.87	1.77	K 47	4	1.0	3201	1415	0.79		
11	196	121.48	1.92	KF 47	4	1.1	2781	1229	0.91		
13	169	104.37	2.2	KA 47	4	1.3	2439	1078	1.04		
15	147	90.86	2.6	KAF47	4	1.5	2152	951	1.18	K 87R57	4
16	137	85.12	2.7			1.7	1894	837	1.34	KF 87R57	4
10	221	83.69	0.9	K 37	6	1.9	1643	726	1.55	KA 87R57	4
12	192	72.54	1.0	KF 37	6	2.2	1443	638	1.76	KAF87R57	4
13	179	67.80	1.1	KA 37	6	2.5	1272	562	2.0		
15	155	58.60	1.2	KAF37	6	2.9	1072	474	2.4		
17	131	49.79	1.4			3.3	964	426	2.6		
						3.7	844	373	3.0		
13	172	106.38	1.1			1.7	1844	815	0.79		
14	158	97.81	1.2			2.0	1604	709	0.91		
17	135	83.69	1.4			2.2	1407	622	1.04		
19	117	72.54	1.6			2.5	1249	552	1.17		
21	109	67.80	1.7			2.9	1097	485	1.33	K 77R37	4
24	95	58.60	2.0			3.2	968	428	1.50	KF 77R37	4
28	80	49.79	2.3			3.9	810	358	1.80	KA 77R37	4
31	72	44.46	2.6			4.3	724	320	2.0	KAF77R37	4
37	61	37.97	3.1			4.9	640	283	2.3		
39	57	35.57	3.3	K 37	4	5.7	557	246	2.6		
46	48	29.96	3.9	KF 37	4	6.4	489	216	3.0		
48	47	28.83	4.0	KA 37	4	7.3	432	191	3.4		
56	40	24.99	4.7	KAF37	4	8.2	385	170	3.8		
60	38	23.36	4.9			9.3	339	150	4.3		
69	33	20.19	5.3			3.3	950	420	0.81		
81	28	17.15	6.1			3.9	817	361	0.94		
91	25	15.31	6.7			4.3	731	323	1.05		
106	21	13.08	7.3			5.1	615	272	1.25	K 67R37	4
114	20	12.14	7.7			5.8	543	240	1.42	KF 67R37	4
133	17	10.49	8.9			6.4	491	217	1.57	KA 67R37	4
156	14	8.91	10			7.3	432	191	1.78	KAF67R37	4
175	13	7.96	11			8.4	376	166	2.05		
204	11	6.80	13			9.7	326	144	2.37		
218	10	6.37	13			12	269	119	2.86		

K



选型参数表

Selection Table

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数						
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole						
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p						
0.37kW						0.37kW											
5.1	618	273	0.91	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	8.5	392	104.37	0.96	K 47	6						
5.8	543	240	1.04			9.7	341	90.86	1.10	KF 47	6						
6.5	486	215	1.16			10	319	85.12	1.18	KA 47	6						
7.2	434	192	1.30			12	282	75.2	1.33	KAF47	6						
8.4	376	166	1.50			K 47 KF 47 KA 47 KAF47	11	315	131.87	1.19							
9.9	319	141	1.77				12	290	121.48	1.30							
11	285	126	1.98				13	249	104.37	1.51							
13	244	108	2.3				15	217	90.86	1.73							
15	215	95	2.6	16	203		85.12	1.85									
3.8	868	174.99	2.9	K 87	8		18	180	75.20	2.1							
							20	167	69.84	2.3							
							22	151	63.30	2.5							
						14	234	97.81	0.80	K 37 KF 37 KA 37 KAF37	4						
17	200	83.69	0.94														
19	173	72.54	1.08														
21	162	67.80	1.16														
24	140	58.60	1.34														
28	119	49.79	1.58														
31	106	44.46	1.77														
37	91	37.97	2.07														
39	85	35.57	2.21	K 37 KF 37 KA 37 KAF37	4												
46	72	29.96	2.63														
48	69	28.83	2.73														
56	60	24.99	3.15														
60	56	23.36	3.28														
69	48	20.19	3.60														
81	41	17.15	4.13														
91	37	15.31	4.5														
106	31	13.08	5.0	0.55kW	0.08	57099	16978	0.82	K 187R97 KA 187R97	4							
114	29	12.14	5.2														
133	25	10.49	6.0														
156	21	8.91	7.1														
175	19	7.96	7.7														
204	16	6.80	8.7														
218	15	6.37	9.0														
259	13	5.56	10														
7.23	459	192.18	3.2	K 77	4	0.10	47998	14272	0.98	K 167R97 KA 167R97	4						
						7.75	429	179.37	3.4			0.11	44111	13116	1.07		
						9.02	368	154.02	4.0			0.12	39170	11647	1.20		
						6.2	536	108.03	1.44			K 67	8	0.19	24662	7333	1.9
6.5	509	102.62	1.52	0.12	38783					11532	0.78						
7.4	446	90.04	1.73	0.14	34395					10227	0.87						
7.2	464	123.54	1.66	K 67	6					0.16	28913			8597	1.04		
						8.2	405	108.03	1.90	0.21	21988	6538	1.37				
						8.6	385	102.62	2.0	0.26	18046	5366	1.67				
						9.8	338	90.04	2.3	0.34	13651	4059	2.2				
9.6	346	144.79	2.2	K 67	4	0.20	23142	6881	0.73	K 157R97 KF 157R97 KA 157R97 KAF157R97	4						
						11	295	123.54	2.6			0.23	19947	5931	0.85		
						13	258	108.03	3.0			0.35	13365	3974	1.27		
						15	215	90.04	3.6			0.46	10247	3047	1.65		
7.1	465	123.85	1.2	K 57	6	0.31	14875	4423	0.82	K 127R77 KF 127R77 KA 127R77 KAF127R77	4						
						8.2	406	108.29	1.4			0.37	12783	3801	0.96		
						8.6	386	102.88	1.5			0.43	10886	3237	1.12		
						10	339	90.26	1.7			0.47	9891	2941	1.24		
12	287	76.56	2.0	0.55	8569	2548	1.43	K 127R77 KF 127R77 KA 127R77 KAF127R77	4								
13	259	69.12	2.2	0.72	6477	1926	1.89										
9.6	347	145.14	1.6	K 57	4	0.79	5909					1757	2.1				
						11	296					123.85	1.9	0.90	5183	1541	2.4
						13	259					108.29	2.2	1.0	4513	1342	2.7
						14	246					102.88	2.3	1.2	3958	1177	3.1
15	216	90.26	2.6	1.4	3447	1025	3.5										
18	183	76.56	3.1	K 57	4	KAF57	4										
20	165	69.12	3.4														



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
0.55kW					
0.48	9649	2869	0.78	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
0.56	8421	2504	0.89		
0.63	7409	2203	1.01		
0.74	6286	1869	1.20		
0.82	5680	1689	1.32		
0.91	5156	1533	1.46		
1.1	4429	1317	1.70		
1.2	3868	1150	1.94		
1.4	3414	1015	2.2		
1.6	2929	871	2.6		
1.8	2630	782	2.9		
2.0	2307	686	3.3		
2.3	2038	606	3.7		
1.0	4809	1430	0.8	K 97R57 KF 97R57 KA 97R57 KAF97R57	4
1.1	4241	1261	1.0		
1.3	3706	1102	1.1		
1.5	3218	957	1.3		
1.6	2875	855	1.4		
1.9	2499	743	1.6		
2.1	2189	651	1.8		
2.4	1927	573	2.1		
2.8	1695	504	2.4		
3.2	1470	437	2.8		
3.6	1285	382	3.1	K 87R57 KF 87R57 KA 87R57 KAF87R57	4
4.6	1026	305	3.9		
1.5	3198	951	0.79		
1.7	2815	837	0.90		
1.9	2442	726	1.04		
2.2	2146	638	1.18		
2.5	1890	562	1.34		
2.9	1594	474	1.59		
3.3	1433	426	1.77		
3.7	1254	373	2.0		
4.2	1110	330	2.3	K 77R37 KF 77R37 KA 77R37 KAF77R37	4
4.7	985	293	2.6		
5.6	841	250	3.0		
5.9	794	236	3.2		
6.9	676	201	3.8		
2.5	1856	552	0.78		
2.9	1631	485	0.89		
3.2	1439	428	1.01		
3.9	1204	358	1.21		
4.3	1076	320	1.35		
4.9	952	283	1.53	K 67R37 KF 67R37 KA 67R37 KAF67R37	4
5.7	827	246	1.76		
6.4	726	216	2.0		
7.3	642	191	2.3		
8.2	572	170	2.5		
9.3	504	150	2.9		
5.1	915	272	0.84		
5.8	807	240	0.95		
6.4	730	217	1.1		
7.3	642	191	1.2		
8.4	558	166	1.4	K 57R37 KF 57R37 KA 57R37 KAF57R37	4
9.7	484	144	1.6		
12	400	119	1.9		
7.2	646	192	0.87		
8.4	558	166	1.0		
9.9	474	141	1.2		
11	424	126	1.3		
13	363	108	1.6		
15	319	95	1.8		

K



MACHINERY

选型参数表
Selection Table

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
0.55kW						0.75kW					
39	126	35.57	1.49	K 37 KF 37 KA 37 KAF37	4	1.9	3329	726	0.76	K 87R57 KF 87R57 KA 87R57 KAF87R57	4
46	106	29.96	1.77			2.2	2926	638	0.87		
48	102	28.83	1.84			2.5	2577	562	0.98		
56	89	24.99	2.1			2.9	2174	474	1.17		
60	83	23.36	2.2			3.3	1954	426	1.30		
69	72	20.19	2.4			3.7	1711	373	1.48		
81	61	17.15	2.8			4.2	1513	330	1.68		
91	54	15.31	3.0			4.7	1344	293	1.89	K 77R37 KF 77R37 KA 77R37 KAF77R37	4
106	46	13.08	3.3			5.6	1147	250	2.2		
114	43	12.14	3.5			5.9	1082	236	2.3		
133	37	10.49	4.0			6.9	922	201	2.8		
156	32	8.91	4.8			3.9	1642	358	0.89		
175	28	7.96	5.2			4.3	1468	320	0.99		
204	24	6.80	5.8			4.9	1298	283	1.12		
218	23	6.37	6.0			5.7	1128	246	1.29		
259	19	5.36	6.9			6.4	991	216	1.47		
0.75kW						3.9	1737	175.47	2.3	K 97	8
						4.4	1508	152.31	2.7	KF 97	8
						4.8	1389	140.28	2.9	KA 97	8
										KAF97	8
						4.6	1456	147.09	1.7	K 87	8
						5.4	1254	126.68	2.0	KF 87	8
						5.9	1140	115.16	2.2	KA 87	8
						6.6	1017	102.71	2.5	KAF87	8
						5.2	1295	174.99	2.0	K 87	6
						5.5	1214	164.05	2.1	KF 87	6
0.75kW						6.2	1088	147.09	2.3	KA 87	6
						7.2	937	126.68	2.7	KAF87	6
						7.0	956	197.27	2.7	K 87	4
						8.0	848	174.99	3.0	KF 87	4
						8.5	795	164.05	3.2	KA 87	4
						9.4	712	147.09	3.6	KAF87	4
						6.7	1001	135.28	1.46	K 77	6
						7.1	951	128.52	1.53	KF 77	6
						8.0	840	113.56	1.73	KA 77	6
						9.4	718	97.05	2.0	KAF77	6
0.75kW						10	658	88.97	2.2		6
						9.0	746	154.02	1.95	K 77	4
						10	655	135.28	2.2	KF 77	4
						11	623	128.52	2.3	KA 77	4
						12	550	113.56	2.6	KAF77	4
						14	470	97.05	3.1		
						11	598	123.54	1.29	K 67 KF 67 KA 67 KAF67	4
						13	523	108.03	1.47		
						15	436	90.04	1.77		
						18	370	76.37	2.1		
20	334	68.95	2.3								
23	294	60.66	2.6								
0.75kW						24	277	57.28	2.8		
						11	600	123.85	0.9	K 57 KF 57 KA 57 KAF57	4
						13	525	108.29	1.1		
						14	498	102.88	1.1		
						15	437	90.26	1.3		
						18	371	76.56	1.5		
						20	335	69.12	1.7		
						23	295	60.81	1.9		
						24	278	57.42	2.0		
						28	237	48.89	2.4		
31	215	44.43	2.6								



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
0.75kW						1.1kW					
18	364	75.2	1.03			1.5	6047	899	2.0		
20	338	69.84	1.11			1.8	5314	790	2.3	K 127R77	4
22	307	63.30	1.23	K 47	4	2.0	4641	690	2.6	KF 127R77	4
24	275	56.83	1.37	KF 47	4	2.3	4029	599	3.0	KA 127R77	4
28	237	48.95	1.59	KA 47	4	2.6	3625	539	3.4	KAF127R77	4
30	223	46.03	1.69	KAF47	4	3.0	3148	468	3.9		
35	192	39.61	1.96			1.2	7735	1150	1.0		
39	171	35.39	2.2			1.4	6827	1015	1.1		
45	151	31.19	2.5			1.6	5859	871	1.3		
						1.8	5260	782	1.4	K 107R77	4
31	215	44.46	0.87			2.0	4614	686	1.6	KF 107R77	4
37	184	37.97	1.02			2.3	4076	606	1.8	KA 107R77	4
39	172	35.57	1.09			2.7	3464	515	2.2	KAF107R77	4
46	145	29.96	1.30			3.1	3060	455	2.5		
48	140	28.83	1.35			3.5	2704	402	2.8		
56	121	24.99	1.55			4.0	2361	351	3.2		
60	113	23.36	1.62			4.5	2065	307	3.6		
69	98	20.19	1.78	K 37	4						
81	83	17.15	2.0	KF 37	4	1.9	4998	743	0.81		
91	74	15.31	2.2	KA 37	4	2.1	4379	651	0.92	K 97R57	4
106	63	13.08	2.4	KAF37	4	2.4	3854	573	1.05	KF 97R57	4
114	59	12.14	2.6			2.8	3390	504	1.19	KA 97R57	4
133	51	10.49	3.0			3.2	2939	437	1.38	KAF97R57	4
156	43	8.91	3.5			3.6	2569	382	1.57		
175	39	7.96	3.8			4.1	2300	342	1.76		
204	33	6.80	4.3								
218	31	6.37	4.4			2.9	3188	474	0.80		
259	26	5.36	5.1			3.3	2865	426	0.89		
						3.7	2509	373	1.01	K 87R57	4
						4.2	2220	330	1.14	KF 87R57	4
						4.7	1971	293	1.29	KA 87R57	4
						5.6	1682	250	1.51	KAF87R57	4
						5.9	1587	236	1.60		
						6.9	1352	201	1.88		
						3.9	2548	175.47	1.6	K 97	8
						4.4	2212	152.31	1.8	KF 97	8
						4.8	2037	140.28	2.0	KA 97	8
						5.5	1810	124.61	2.2	KAF97	8
						5.2	1904	175.47	2.1	K 97	6
						5.9	1653	152.31	2.4	KF 97	6
						6.5	1522	140.28	2.7	KA 97	6
						7.3	1352	124.61	3.0	KAF97	6
						8.0	1238	175.47	3.3	K 97	4
						9.1	1074	152.31	3.7	KF 97	4
						10	989	140.28	4.1	KA 97	4
						5.2	1899	174.99	1.34	K 87	6
						5.5	1780	164.05	1.42	KF 87	6
						6.2	1596	147.09	1.59	KA 87	6
						7.2	1375	126.68	1.84	KAF87	6
						8.0	1234	174.99	2.1	K 87	4
						8.5	1157	164.05	2.2	KF 87	4
						9.5	1037	147.09	2.4	KA 87	4
						11	894	126.68	2.8	KAF87	4
						12	812	115.16	3.1		
						6.7	1468	135.28	0.99	K 77	6
						7.1	1395	128.52	1.04	KF 77	6
						8.0	1232	113.56	1.18	KA 77	6
						9.4	1053	97.05	1.38	KAF77	6

K



MACHINERY

选型参数表
Selection Table

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f_s	机 型 号 Type Type	极 数 Pole p
1.1kW						1.5kW					
10	954	135.28	1.53	K 77 KF 77 KA 77 KAF77	4	0.21	61360	6738	0.77	K 187R97 KA 187R97	4
11	906	128.52	1.61		4	0.23	54494	5984	0.86		4
12	801	113.56	1.82		4	0.26	48720	5350	0.96		4
14	685	97.05	2.1		4	0.29	43803	4810	1.07		4
16	628	88.97	2.3		4	0.32	39741	4364	1.18		4
18	551	78.07	2.6		4	0.39	32866	3609	1.43		4
19	522	73.99	2.8			0.46	27884	3062	1.69		
13	762	108.03	1.01	K 67 KF 67 KA 67 KAF67	4	0.56	22940	2519	2.0	K 167R97 KA 167R97	4
14	724	102.62	1.06		4	0.62	20654	2268	2.3		4
16	635	90.04	1.21		4	0.34	36964	4059	0.81		4
18	539	76.37	1.43		4	0.42	30589	3359	0.98		4
20	486	68.95	1.58		4	0.51	24961	2741	1.21		4
23	428	60.66	1.80		4	0.64	19798	2174	1.52		4
24	404	57.28	1.91		4	0.82	15463	1698	1.95		4
29	344	48.77	2.2		4	1.0	12767	1402	2.4		4
32	313	44.32	2.5			1.1	11757	1291	2.6		
36	271	38.39	2.8			0.6	21118	2319	0.8	K 157R97 KF 157R97 KA 157R97 KAF157R97	4
16	637	90.26	0.89	K 57 KF 57 KA 57 KAF57	4	0.8	15299	1680	1.1		4
18	540	76.56	1.04		4	1.0	12431	1365	1.4		4
20	488	69.12	1.16		4	1.1	11192	1229	1.5		4
23	429	60.81	1.31		4	1.3	9954	1093	1.7		4
24	405	57.42	1.39		4	1.5	8578	942	2.0		4
29	345	48.89	1.64		4	1.6	7777	854	2.2		4
32	313	44.43	1.80		4	2.5	5145	565	3.3		4
36	271	38.49	2.1		4	2.8	4581	503	3.7		4
39	252	35.70	2.2		4	2.6	4881	536	2.5	K 127R87 KF 127R87 KA 127R87 KAF127R87	4
46	214	30.28	2.6		4	3.3	3807	418	3.2		4
51	193	27.34	2.9		4	3.8	3342	367	3.7		4
58	170	24.05	3.3		4	0.80	16000	1757	0.76		4
62	160	22.71	3.5		4	0.91	14033	1541	0.87	K 127R77 KF 127R77 KA 127R77 KAF127R77	4
72	136	19.34	4.0		4	1.0	12221	1342	1.00		4
80	124	17.57	4.2		4	1.2	10718	1177	1.14		4
92	107	15.22	4.6		4	1.4	9334	1025	1.31		4
106	93	13.25	4.7		4	1.6	8187	899	1.49		4
117	84	11.92	4.9		4	1.8	7194	790	1.70		4
124	79	11.26	5.1		4	2.0	6284	690	1.94		4
146	68	9.59	5.6		4	2.3	5455	599	2.2		4
161	61	8.71	6.0			2.6	4908	539	2.5	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
185	53	7.55	6.4			3.0	4262	468	2.9		4
213	46	6.57	7.0			3.4	3734	410	3.3		4
25	401	56.83	0.94	K 47 KF 47 KA 47 KAF47	4	1.4	9243	1015	0.8		4
29	345	48.95	1.09		4	1.6	7932	871	0.9		4
30	325	46.03	1.16		4	1.8	7121	782	1.1		4
35	279	39.61	1.35		4	2.0	6247	686	1.2		4
40	250	35.39	1.51		4	2.3	5519	606	1.4		4
45	220	31.19	1.71		4	2.7	4690	515	1.6		4
48	207	29.32	1.82		4	3.1	4144	455	1.8		4
54	183	25.91	2.1		4	3.5	3661	402	2.1		4
64	154	21.81	2.4			4.0	3196	351	2.4	K 97R57 KF 97R57 KA 97R57 KAF97R57	4
72	138	19.58	2.7			4.6	2796	307	2.7		4
47	211	29.96	0.89	K 37 KF 37 KA 37 KAF37	4	2.4	5218	573	0.8		4
56	176	24.99	1.07		4	2.8	4590	504	0.9		4
60	165	23.36	1.11		4	3.2	3980	437	1.0		4
69	142	20.19	1.22		4	3.7	3479	382	1.2		4
82	121	17.15	1.40		4	4.1	3114	342	1.3		4
91	108	15.31	1.52		4	4.6	2778	305	1.5		4
107	92	13.08	1.68		4	5.4	2350	258	1.7		4
115	86	12.14	1.76		4	6.0	2113	232	1.9		4
133	74	10.49	2.0		4	7.0	1812	199	2.2		4
157	63	8.91	2.4		4						
176	56	7.96	2.6		4						
206	48	6.80	2.9		4						
220	45	6.37	3.0		4						
261	38	5.36	3.5		4						



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
1.5kW						1.5kW					
4.2	3005	330	0.84	K 87R57	4	23	585	60.81	0.96		
4.8	2668	293	0.95	KF 87R57	4	24	552	57.42	1.02		
5.6	2277	250	1.11	KA 87R57	4	29	470	48.89	1.20		
5.9	2149	236	1.18	KAF87R57	4	32	427	44.43	1.32	K 57	4
7.0	1830	201	1.39			36	370	38.49	1.52	KF 57	4
7.7	1667	183	1.52			39	343	35.70	1.64	KA 57	4
						46	291	30.28	1.94	KAF57	4
4.9	2770	141.93	2.7	K 107	8	51	263	27.34	2.1		
5.8	2334	119.58	3.2	KF 107	8	58	231	24.05	2.4		
6.2	2163	110.83	3.5	KA 107	8	62	218	22.71	2.6		
				KAF107	8	72	186	19.34	2.9		
4.5	2972	152.31	1.36	K 97	8	35	381	39.61	0.99		
4.9	2738	140.28	1.48	KF 97	8	40	340	35.39	1.10		
5.5	2432	124.61	1.66	KA 97	8	45	300	31.19	1.25		
				KAF97	8	48	282	29.32	1.33	K 47	4
5.2	2569	175.47	1.57	K 97	6	54	249	25.91	1.51	KF 47	4
6.0	2229	152.31	1.81	KF 97	6	64	210	21.81	1.79	KA 47	4
6.6	2053	140.28	1.97	KA 97	6	72	188	19.58	2.0	KAF47	4
7.4	1824	124.61	2.2	KAF97	6	83	162	16.86	2.2		
						88	153	15.86	2.3		
8.0	1688	175.47	2.4	K 97	4	103	131	13.65	2.6		
9.2	1465	152.31	2.7	KF 97	4	115	117	12.19	2.8		
10	1349	140.28	3.0	KA 97	4	119	113	11.77	2.3		
11	1199	124.61	3.4	KAF97	4						
6.3	2153	147.09	1.18	K 87	6	60	225	23.36	0.82		
7.2	1854	126.68	1.37	KF 87	6	69	194	20.19	0.90		
7.9	1686	115.16	1.50	KA 87	6	82	165	17.15	1.03		
9.0	1503	102.71	1.69	KAF87	6	91	147	15.31	1.12	K 37	4
						107	126	13.08	1.23	KF 37	4
8.0	1683	174.99	1.51			115	117	12.14	1.29	KA 37	4
8.5	1578	164.05	1.61	K 87	4	133	101	10.49	1.49	KAF37	4
9.5	1415	147.09	1.79	KF 87	4	157	86	8.91	1.75		
11	1218	126.68	2.1	KA 87	4	176	77	7.96	1.90		
12	1108	115.16	2.3	KAF87	4	206	65	6.80	2.2		
14	988	102.71	2.6			220	61	6.37	2.2		
16	830	86.34	3.1			261	52	5.36	2.6		
8.0	1680	113.56	0.87	K 77	6	2.2kW					
9.4	1436	97.05	1.01	KF 77	6	0.33	57466	4364	0.82		
10	1317	88.97	1.11	KA 77	6	0.39	47524	3609	0.99		
12	1155	78.07	1.26	KAF77	6	0.46	40321	3062	1.17		
10	1301	135.28	1.12			0.50	37108	2818	1.27		
11	1236	128.52	1.18			0.56	33171	2519	1.42	K 187R97	4
12	1092	113.56	1.33			0.63	29866	2268	1.57	KA 187R97	4
14	933	97.05	1.56	K 77	4	0.69	27048	2054	1.74		
16	856	88.97	1.70	KF 77	4	0.78	23979	1821	1.96		
18	751	78.07	1.94	KA 77	4	0.88	21135	1605	2.2		
19	712	73.99	2.0	KAF77	4						
22	623	64.75	2.3			0.52	36094	2741	0.83		
24	561	58.34	2.6			0.63	29655	2252	1.01		
27	492	51.18	3.0			0.65	28628	2174	1.05	K 167R97	4
31	434	45.16	3.4			0.84	22360	1698	1.35	KA 167R97	4
35	385	40.04	3.8			1.0	18462	1402	1.63		
16	866	90.04	0.89			1.1	17000	1291	1.77		
18	735	76.37	1.05			1.3	14498	1101	2.1		
20	663	68.95	1.16			1.5	12431	944	2.4		
23	583	60.66	1.32	K 67	4	0.85	22123	1680	0.76		
24	551	57.28	1.40	KF 67	4	1.0	17975	1365	0.94	K 157R97	4
29	469	48.77	1.64	KA 67	4	1.2	16184	1229	1.05	KF 157R97	4
32	426	44.32	1.81	KAF67	4	1.3	14393	1093	1.18	KA 157R97	4
36	369	38.39	2.1			1.5	12404	942	1.36	KAF157R97	4
39	343	35.62	2.2			1.7	11246	854	1.50		
46	291	30.22	2.7			1.9	9955	756	1.70		
51	262	27.28	2.9								
58	231	24.00	3.3								

K



Selection Table

K



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
3.0kW						3.0kW					
0.46	54983	3062	0.85	K 187R97 KA 187R97	4	10	2692	141.93	2.8	K 107	4
0.5	50602	2818	0.93			12	2268	119.58	3.3	KF 107	4
0.56	45233	2519	1.04							KA 107	4
0.63	40726	2268	1.15							KAF107	4
0.69	36883	2054	1.27			7.7	3496	124.61	1.16	K 97	6
0.78	32699	1821	1.44			9.3	2911	103.78	1.39	KF 97	6
0.88	28820	1605	1.63			9.9	2716	96.80	1.49	KA 97	6
1.0	25050	1395	1.88			11	2427	86.52	1.67	KAF97	6
1.2	21476	1196	2.2								
0.84	30490	1698	0.99	K 167R97 KF 167R97 KA 167R97 KAF167R97	4	8.1	3328	175.47	1.21	K 97 KF 97 KA 97 KAF97	4
1.0	25175	1402	1.2			9.3	2889	152.31	1.40		
1.1	23182	1291	1.3			10	2660	140.28	1.52		
1.3	19770	1101	1.52			11	2363	124.61	1.71		
1.5	16951	944	1.77			14	1968	103.78	2.05		
1.7	15137	843	1.99			15	1836	96.80	2.20		
1.9	13593	757	2.2			16	1646	86.52	2.46		
						18	1477	77.89	2.74		
1.2	22069	1229	0.77	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	20	1338	70.54	3.02	K 87 KF 87 KA 87 KAF87	4
1.3	19627	1093	0.86			23	1186	62.55	3.41		
1.5	16915	942	1.00			25	1072	56.55	3.77		
1.7	15335	854	1.10								
1.9	13575	756	1.25			9.6	2790	147.09	0.91		
2.5	10146	565	1.67			11	2403	126.68	1.06		
2.8	9032	503	1.87			12	2184	115.16	1.16	K 77 KF 77 KA 77 KAF77	4
						14	1948	102.71	1.30		
2.6	9625	536	1.27	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	16	1637	86.34	1.55		
3.0	8494	473	1.44			18	1505	79.34	1.69		
3.4	7506	418	1.63			20	1336	70.46	1.90		
3.9	6590	367	1.85			23	1195	63.00	2.1		
4.3	5926	330	2.1			25	1074	56.64	2.4		
4.9	5207	290	2.3			29	932	49.16	2.7		
						32	835	44.02	2.9	K 77 KF 77 KA 77 KAF77	4
1.8	14186	790	0.86	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	39	693	36.52	3.4		
2.1	12390	690	0.99			16	1687	88.97	0.86		
2.4	10756	599	1.14			18	1481	78.07	0.98		
2.6	9679	539	1.26			19	1403	73.99	1.04		
3.0	8404	468	1.45			22	1228	64.75	1.19		
3.5	7362	410	1.66			24	1106	58.34	1.32		
3.1	8170	455	0.92	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	28	971	51.18	1.50	K 67 KF 67 KA 67 KAF67	4
3.5	7219	402	1.04			31	856	45.16	1.70		
4.0	6303	351	1.19			35	759	40.04	1.92		
4.6	5513	307	1.36			40	668	35.20	2.2		
5.1	4974	277	1.51			46	586	30.89	2.5		
5.8	4363	243	1.72			32	841	44.32	0.92		
6.6	3861	215	1.95			37	728	38.39	1.06		
7.5	3394	189	2.2			40	676	35.62	1.14		
8.5	3017	168	2.5			47	573	30.22	1.34		
9.5	2676	149	2.8			52	517	27.28	1.49		
10	2496	139	3.0			59	455	24.00	1.65		
5.5	4893	258	0.83	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	63	430	22.66	1.71	K 57 KF 57 KA 57 KAF57	4
6.1	4400	232	0.92			74	366	19.30	1.95		
7.1	3774	199	1.07			81	333	17.54	2.1		
						93	288	15.19	2.3		
5.0	5366	141.46	1.40	K 107 KF 107 KA 107 KAF107	8	107	251	13.22	2.5	K 57 KF 57 KA 57 KAF57	4
5.9	4543	119.76	1.66			116	232	12.24	2.1		
6.4	4204	110.83	1.79			136	198	10.42	2.4		
7.1	3768	99.34	2.0			150	180	9.47	2.5		
7.9	3402	89.68	2.2			47	574	30.28	0.98		
6.8	3968	141.46	1.9	K 107 KF 107 KA 107 KAF107	6	52	519	27.34	1.09		
8.0	3360	119.76	2.2			59	456	24.05	1.24		
8.7	3109	110.83	2.4			63	431	22.71	1.31		
9.7	2787	99.34	2.7			73	367	19.34	1.47		
						81	333	17.57	1.57		

K



MACHINERY

选型参数表
Selection Table

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
3.0kW					
93	289	15.22	1.74		
107	251	13.25	1.9		
119	226	11.92	1.7	K 57	4
126	214	11.26	1.8	KF 57	4
148	182	9.59	2.1	KA 57	4
163	165	8.71	2.2	KAF57	4
188	143	7.55	2.4		
216	125	6.57	2.6		
73	371	19.58	1.01		
84	320	16.86	1.12		
90	301	15.86	1.19		
104	259	13.65	1.31		
116	231	12.19	1.42	K 47	4
121	223	11.77	1.18	KF 47	4
134	200	10.56	1.31	KA 47	4
156	173	9.1	1.53	KAF47	4
166	162	8.56	1.56		
193	140	7.36	1.68		
216	125	6.58	1.81		
244	110	5.81	1.96		
159	169	8.91	0.89	K 37	4
178	151	7.96	0.97	KF 37	4
209	129	6.8	1.09	KA 37	4
223	121	6.37	1.13	KAF37	4
265	102	5.36	1.29		
4.0kW					
1.7	19697	825	2.4	K 187R107	4
2.8	12272	514	3.8	KA 187R107	4
0.57	59473	2510	0.79		
0.63	53547	2268	0.88		
0.70	48494	2054	0.97		
0.79	42993	1821	1.09	K 187R97	4
0.90	37894	1605	1.24	KA 187R97	4
1.0	32936	1395	1.43		
1.2	28237	1196	1.66		
1.4	24696	1046	1.90		
1.5	22240	942	2.1		
1.0	33101	1402	0.91		
1.1	30480	1291	0.99		
1.3	25994	1101	1.16	K 167R97	4
1.5	22288	944	1.35	KA 167R97	4
1.7	19903	843	1.51		
1.9	17873	757	1.68		
2.3	14874	630	2.0		
1.7	20163	854	0.84	K 157R97	4
1.9	17849	756	0.95	KF 157R97	4
2.5	13339	565	1.27	KA 157R97	4
2.9	11876	503	1.42	KAF157R97	4
3.3	10223	433	1.66		
2.7	12655	536	0.97		
3.0	11167	473	1.09	K 127R87	4
3.4	9869	418	1.24	KF 127R87	4
3.9	8665	367	1.41	KA 127R87	4
4.3	7901	330	1.55	KAF127R87	4
4.9	6943	290	1.76		
5.6	6057	253	2.0		
2.4	14341	599	0.85	K 127R77	4
2.6	12905	539	0.95	KF 127R77	4
3.0	11205	468	1.09	KA 127R77	4
3.5	9816	410	1.24	KAF127R77	4

4.0kW

4.0	8404	351	0.89		
4.6	7350	307	1.02		
5.1	6632	277	1.13	K 107R77	4
5.8	5818	243	1.29	KF 107R77	4
6.6	5148	215	1.46	KA 107R77	4
7.5	4525	189	1.66	KAF107R77	4
8.5	4022	168	1.68		
9.5	3567	149	1.9		
11	3232	135	2.1		

7.1	5032	199	0.80	K 97R57	4
				KF 97R57	4
				KA 97R57	4
				KAF97R57	4

5.3	6825	134.94	1.8	K 127	8
5.8	6202	122.60	2.0	KF 127	8
6.4	5570	110.13	2.2	KA 127	8
				KAF127	8

6.6	5464	146.07	2.2	K 127	6
7.1	5047	134.94	2.4	KF 127	6
7.8	4587	122.60	2.7	KA 127	6
8.7	4119	110.13	3.0	KAF127	6

6.4	5605	110.83	1.34	K 107	8
7.1	5024	99.34	1.50	KF 107	8
7.9	4536	89.68	1.66	KA 107	8
8.7	4120	81.46	1.83	KAF107	8

6.8	5309	141.93	1.42	K 107	6
8.0	4473	119.58	1.68	KF 107	6
8.7	4146	110.83	1.81	KA 107	6
9.7	3716	99.34	2.0	KAF107	6
11	3354	89.68	2.2		

10	3527	141.46	2.1		
12	2986	119.76	2.5		
13	2764	110.83	2.7	K 107	4
14	2477	99.34	3.0	KF 107	4
16	2236	89.68	3.4	KA 107	4
18	2031	81.46	3.7	KAF107	4
20	1802	72.27	4.2		

10	3498	140.28	1.16		
12	3107	124.61	1.30	K 97	4
14	2588	103.78	1.56	KF 97	4
15	2414	96.80	1.67	KA 97	4
17	2157	86.52	1.87	KAF97	4
18	1942	77.89	2.1		
20	1759	70.54	2.3		

13	2872	115.16	0.88		
14	2561	102.71	0.99		
17	2153	86.34	1.18		
18	1978	79.34	1.28	K 87	4
20	1757	70.46	1.44	KF 87	4
23	1571	63.00	1.62	KA 87	4
25	1412	56.64	1.80	KAF87	4
29	1226	49.16	2.1		
33	1098	44.02	2.3		
39	911	36.52	2.8		



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
4.0kW						5.5kW					
22	1615	64.75	0.90			3.4	13570	418	0.90		
25	1455	58.34	1.00			3.9	11914	367	1.03		
28	1276	51.18	1.14			4.4	10713	330	1.14	K 127R87	4
32	1126	45.16	1.29	K 77	4	5.0	9414	290	1.30	KF 127R87	4
36	998	40.04	1.46	KF 77	4	5.7	8213	253	1.49	KA 127R87	4
38	957	38.39	1.52	KA 77	4	6.7	6980	215	1.75	KAF127R87	4
41	878	35.20	1.66	KAF77	4	7.1	6590	203	1.71		
47	770	30.89	1.89			8.6	5454	168	2.1		
49	730	29.27	2.0			9.7	4805	148	2.3		
56	639	25.62	2.3								
62	576	23.08	2.5			6.7	6980	215	1.08	K 107R77	4
71	505	20.25	2.9			7.6	6136	189	1.23	KF 107R77	4
						8.6	5454	168	1.38	KA 107R77	4
						9.7	4837	149	1.55	KAF107R77	4
						11	4383	135	1.72		
48	754	30.22	1.02			4.8	10288	150.03	1.64	K 157	8
53	680	27.28	1.13			5.9	8423	122.83	2.0	KF 157	8
60	598	24.00	1.26			7.2	6833	99.65	2.5	KA 157	8
64	565	22.66	1.30			7.8	6338	92.42	2.7	KAF157	8
75	481	19.30	1.48	K 67	4						
82	437	17.54	1.59	KF 67	4	5.3	9253	134.94	1.3	K 127	8
95	379	15.19	1.74	KA 67	4	5.9	8399	122.60	1.5	KF 127	8
109	330	13.22	1.91	KAF67	4	6.5	7556	110.13	1.6	KA 127	8
118	305	12.24	1.63			8.1	6143	89.43	2.0	KAF127	8
138	260	10.42	1.81								
152	236	9.47	1.91			7.1	6940	134.94	1.76	K 127	6
176	204	8.20	2.02			7.8	6299	122.60	1.94	KF 127	6
202	178	7.14	2.2			8.7	5667	110.13	2.2	KA 127	6
						11	4599	89.43	2.7	KAF127	6
60	600	24.05	0.94			8.7	5700	110.83	1.32	K 107	6
63	566	22.71	1.00			9.7	5109	99.34	1.47	KF 107	6
74	482	19.34	1.12			11	4612	89.68	1.63	KA 107	6
82	438	17.57	1.19	K 57	4	12	4190	81.46	1.79	KAF107	6
95	380	15.22	1.33	KF 57	4						
109	330	13.25	1.45	KA 57	4	10	4866	141.93	1.55		
121	297	11.92	1.31	KAF57	4	12	4100	119.58	1.83	K 107	4
128	281	11.26	1.39			13	3800	110.83	1.98	KF 107	4
150	239	9.59	1.59			14	3406	99.34	2.2	KA 107	4
165	217	8.71	1.69			16	3075	89.68	2.4	KAF107	4
191	188	7.55	1.82			18	2793	81.46	2.7		
219	164	6.57	1.98								
5.5kW						12	4273	124.61	0.95		
0.79	59116	1821	0.80			14	3558	103.78	1.14		
0.90	52104	1605	0.90			15	3319	96.80	1.22	K 97	4
1.0	45286	1395	1.04	K 187R97	4	17	2967	86.52	1.36	KF 97	4
1.2	38826	1196	1.21	KA 187R97	4	18	2671	77.89	1.51	KA 97	4
1.4	33957	1046	1.38			20	2419	70.54	1.67	KAF97	4
1.5	30580	942	1.54			23	2145	62.55	1.88		
2.0	23926	737	2.0			25	1939	56.55	2.1		
2.3	20095	619	2.3			30	1643	47.93	2.5		
1.31	35742	1101	0.84								
1.5	30645	944	0.98			17	2960	86.34	1.37		
1.7	27367	843	1.10			18	2720	79.34	1.49		
1.9	24575	757	1.22	K 167R97	4	20	2416	70.46	1.67		
2.3	20452	630	1.47	KA 167R97	4	23	2160	63.00	1.87	K 87	4
2.6	18212	561	1.65			25	1942	56.64	2.1	KF 87	4
3.0	15550	479	1.93			29	1686	49.16	1.51	KA 87	4
3.4	13700	422	2.2			33	1509	44.02	1.68	KAF87	4
						39	1252	36.52	2.0		
						46	1076	31.39	2.4		
						52	956	27.88	2.7		
2.2	21458	661	0.79			32	1548	45.16	0.94	K 77	4
2.5	18342	565	0.92	K 157R97	4	36	1373	40.04	1.06	KF 77	4
2.9	16329	503	1.04	KF 157R97	4	47	1059	30.89	1.38	KA 77	4
3.3	14057	433	1.20	KA 157R97	4	49	1004	29.27	1.45	KAF77	4
3.8	12271	378	1.38	KAF157R97	4	56	878	25.62	1.66		
4.3	10778	332	1.57								

K



MACHINERY

选型参数表
Selection Table

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数																														
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole																														
r/min	Nm	i	f _s	Type	p	r/min	Nm	i	f _s	Type	p																														
5.5kW						7.5kW																																			
62	791	23.08	1.84	K 77 KF 77 KA 77 KAF77	4	6.4	10522	150.03	1.6	K 157 KF 157 KA 157 KAF157	6																														
71	694	20.25	2.0			7.8	8614	122.83	2.0																																
81	613	17.87	2.2			9.6	6989	99.65	2.4																																
91	543	15.84	2.4			10	6482	92.42	2.6																																
107	464	13.52	2.5			12	5593	79.75	3.0																																
117	424	12.36	2.6			7.1	9464	134.94	1.29	K 127	6																														
133	371	10.81	2.7			7.8	8590	122.48	1.42	KF 127	6																														
60 64 75 82 95 109 118 138 152 176 202	823 777 662 601 521 453 420 357 325 281 245	24.00 22.66 19.30 17.54 15.19 13.22 12.24 10.42 9.47 8.20 7.14	0.91 0.94 1.08 1.16 1.26 1.39 1.39 1.32 1.39 1.47 1.61	K 67 KF 67 KA 67 KAF67	4	8.7	7727	110.18	1.58	KA 127	6																														
						11	6272	89.43	1.95	KAF127	6																														
						10 11 12 13 16 18 21	6736 6223 5648 5081 4124 3805 3272	146.07 134.94 122.60 110.13 89.43 82.52 70.95	1.81 1.96 2.2 2.4 3.0 3.2 3.7	K 127 KF 127 KA 127 KAF127	4																														
												10 12 13 15 16 18 20 22 26 30 35 40	6545 5514 5111 4581 4136 3757 3333 3024 2599 2269 1925 1682	141.93 119.58 110.83 99.34 89.68 81.46 72.27 65.58 56.37 49.20 41.74 36.48	1.15 1.36 1.47 1.64 1.82 2.00 2.3 2.5 2.9 3.2 3.6 4.0	K 107 KF 107 KA 107 KAF107	4																								
																		15 17 19 21 23 26 30 35 38 43	4464 3990 3592 3253 2884 2608 2210 1931 1766 1579	96.80 86.52 77.89 70.54 62.55 56.55 47.93 41.87 38.30 34.23	0.91 1.01 1.13 1.24 1.40 1.55 1.83 2.1 2.3 2.6	K 97 KF 97 KA 97 KAF97	4																		
																								23 26 30 33 40 47 52 59 65 75 84 92 101	2905 2612 2267 2030 1684 1448 1286 1149 1033 897 803 736 666	63.00 56.64 49.16 44.02 36.52 31.39 27.88 24.92 22.41 19.45 17.42 15.95 14.45	0.87 0.97 1.12 1.20 1.40 1.75 1.90 2.0 2.1 2.4 2.6 2.3 3.0	K 87 KF 87 KA 87 KAF87	4												
																														47 50 57 63 72 82 92 108 118 135 153 173 202	1424 1350 1181 1064 934 824 730 623 570 499 440 390 333	30.89 29.27 25.62 23.08 20.25 17.87 15.84 13.52 12.36 10.81 9.54 8.46 7.22	1.02 1.08 1.23 1.37 1.56 1.65 1.80 1.82 1.89 1.95 2.0 2.1 2.3	K 77 KF 77 KA 77 KAF77	4						
																																				4.4 5.3	15382 12623	164.44 135.38	2.0 2.4	K 167 KA 167	8 8

K



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
11kW						11kW					
1.8	52831	825	0.89	K 187R107 KA 187R107	4	20	4888	72.27	1.54	K 107 KF 107 KA 107 KAF107	4
2.0	46107	720	1.02			22	4435	65.58	1.70		
2.4	39319	614	1.20			26	3813	56.37	1.97		
2.8	32915	514	1.43			30	3328	49.2	2.2		
3.3	28753	449	1.63			35	2823	41.74	2.5		
4.0	23374	365	2.0			40	2467	36.48	2.7		
2.0	47196	737	1.00	K 187R97 KA 187R97	4	21	4771	70.54	0.85	K 97 KF 97 KA 97 KAF97	4
2.4	39639	619	1.19			23	4231	62.55	0.96		
2.8	33556	524	1.40			26	3825	56.55	1.06		
4.7	20044	313	1.50	K 167R107 KA 167R107	4	30	3242	47.93	1.25		
5.3	17482	273	1.72			35	2832	41.87	1.43		
5.8	16009	250	1.88			38	2590	38.3	1.56		
6.7	13960	218	2.2			43	2315	34.23	1.75		
7.2	13000	203	2.3			47	2085	30.82	1.94		
2.6	35925	561	0.84	K 167R97 KA 167R97	4	52	1888	27.91	2.1		
3.0	30674	479	0.98			59	1674	24.75	2.4		
3.5	27024	422	1.11			65	1513	22.37	2.7		
4.0	23502	367	1.28			33	2977	44.02	0.82		
4.4	21260	332	0.80	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	40	2470	36.52	0.95		
5.0	18571	290	0.91			47	2123	31.39	1.20		
6.8	13768	215	0.89			52	1886	27.88	1.30		
7.2	13000	203	0.94			59	1685	24.92	1.39		
8.7	10758	168	1.14	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	65	1516	22.41	1.43	K 87 KF 87 KA 87 KAF87	4
9.9	9478	148	1.29			75	1315	19.45	1.64		
5.4	18313	135.38	1.64			84	1178	17.42	1.76		
6.6	14932	110.38	2.0			92	1079	15.95	1.57		
5.9	16740	164.44	1.80	K 167 KA 167	6	101	977	14.45	1.9		
7.2	13782	135.38	2.2			116	849	12.56	2.0		
8.9	11122	164.44	2.7	K 167 KA 167	4	131	753	11.13	2.1		
11	9158	135.38	3.3			147	674	9.96	2.2		
5.9	16615	122.83	1.02	K 157 KF 157 KA 157 KAF157	8	177	559	8.27	2.4		
7.3	13480	99.65	1.26			203	486	7.19	2.5		
7.9	12502	92.42	1.35			63	1561	23.08	0.93	K 77 KF 77 KA 77 KAF77	4
9.1	10788	79.75	1.57			72	1370	20.25	1.03		
6.5	15273	150.03	1.11	K 157 KF 157 KA 157 KAF157	6	82	1209	17.87	1.13		
7.9	12504	122.83	1.35			92	1071	15.84	1.23		
9.7	10144	99.65	1.67			108	914	13.52	1.38		
10	9408	92.42	1.80			118	836	12.36	1.12		
12	8119	79.75	2.1			135	731	10.81	1.27		
9.7	10147	150.03	1.67	K 157 KF 157 KA 157 KAF157	4	153	645	9.54	1.37		
12	8308	122.83	2.0			173	572	8.46	1.46		
15	6740	99.65	2.5			202	488	7.22	1.57		
16	6251	92.42	2.7			15kW					
11	9127	134.94	1.34	K 127 KF 127 KA 127 KAF127	4	2.4	53617	614	0.88	K 187R107 KA 187R107	4
12	8295	122.60	1.47			2.8	44884	514	1.05		
13	7449	110.13	1.64			3.3	39208	449	1.20		
16	6049	89.43	2.0			4.0	31873	365	1.47		
18	5581	82.52	2.2			5.4	23403	268	2.0		
21	4799	70.95	2.5			4.7	27332	313	1.10	K 167R107 KA 167R107	4
13	7496	110.83	1.00	K 107 KF 107 KA 107 KAF107	4	5.3	23839	273	1.26		
15	6719	99.34	1.12			5.8	21831	250	1.38		
16	6066	89.68	1.24			6.7	19037	218	1.58		
18	5510	81.46	1.36			7.2	17727	203	1.70		
						7.9	16155	185	1.86		
						9.0	14234	163	2.1		
						6.2	20696	237	0.82	K 157R107 KF 157R107 KA 157R107 KAF157R107	4
						7.0	18338	210	0.92		
						7.9	16068	184	1.05		
						9.4	13535	155	1.25		
						12	11003	126	1.54		
						13	9606	110	1.76		

K



MACHINERY

选型参数表
Selection Table

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机型号 Type Type	极数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机型号 Type Type	极数 Pole p
15kW						18kW					
5.4	25096	180.78	1.87	K 187	6	2.9	54981	514	0.85	K 187R107 KA 187R107	4 4
6.0	22285	160.53	2.1	KA 187	6	3.3	48028	449	0.98		
7.2	18793	135.38	1.60	K 167	6	4.0	39043	365	1.20		
8.8	15324	110.39	1.96	KA 167	6	5.5	28667	268	1.64		
						6.5	24281	227	1.9		
8.9	15166	164.44	1.12	K 167	4	4.7	33481	313	0.90	K 167R107 KA 167R107	4 4
11	12486	135.38	1.36	KA 167	4	5.4	29202	273	1.03		
7.9	16990	122.39	1.00	K 157	6	5.9	26742	250	1.12		
9.7	13833	99.65	1.22	KF 157	6	6.7	23319	218	1.29		
10	12830	92.42	1.32	KA 157	6	7.2	21714	203	1.39		
12	11071	79.75	1.53	KAF157	6	7.9	19789	185	1.52		
14	9770	70.35	1.73			9.0	17436	163	1.73		
						11	14868	139	2.0		
						12	12943	121	2.3		
9.7	13837	150.03	1.22	K 157	4	8.0	19682	184	0.86	K 157R107	4
12	11329	122.83	1.49	KF 157	4	9.5	16580	155	1.02	KF 157R107	4
15	9191	99.65	1.84	KA 157	4	12	13478	126	1.26	KA 157R107	4
16	8524	92.42	2.0	KAF157	4	13	11766	110	1.44	KAF157R107	4
18	7355	79.75	2.3								
11	12445	134.94	0.97	K 127 KF 127 KA 127 KAF127	4 4 4 4	5.4	30951	180.78	1.52	K 187 KA 187	6 6
12	11307	122.60	1.08			6.0	27484	160.53	1.71		
13	10157	110.13	1.20			6.7	24745	144.53	1.9		
16	8248	89.43	1.48			7.4	22317	130.35	2.1		
18	7611	82.52	1.61			8.1	20424	180.78	2.3	K 187 KA 187	4 4
21	6544	70.95	1.87			9.2	18136	160.53	2.6		
23	5774	62.60	2.1			10	16328	144.53	2.9		
27	4987	54.07	2.5			11	14726	130.35	3.2		
31	4410	47.82	2.8								
16	8271	89.68	0.91	K 107 KF 107 KA 107 KAF107	4 4 4 4	11	15195	134.5	1.98	K 167 KA 167	4 4
18	7513	81.46	1.00			13	12471	110.39	2.4		
20	6665	72.27	1.13			17	9851	87.20	3.1		
22	6048	65.58	1.24			10	17061	99.65	0.99	K 157 KF 157 KA 157 KAF157	6 6 6 6
26	5199	56.37	1.45			11	15823	92.42	1.08		
30	4538	49.2	1.62			12	13654	79.75	1.24		
35	3850	41.74	1.80			14	12050	70.38	1.4		
40	3365	36.48	2.0			12	13827	122.39	1.22	K 157 KF 157 KA 157 KAF157	4 4 4 4
45	2972	32.22	2.2			15	11258	99.65	1.50		
47	2844	30.84	2.3			16	10441	92.42	1.62		
51	2637	28.59	2.6			18	9010	79.75	1.88		
						21	7951	70.38	2.1		
						24	6894	61.02	2.5		
						27	6133	54.29	2.8		
						31	5286	46.79	3.2	K 127 KF 127 KA 127 KAF127	4 4 4 4
						39	4295	38.02	3.9		
						13	12442	110.13	0.98		
						16	10103	89.43	1.21		
						18	9323	82.52	1.31		
						21	8016	70.95	1.52		
						23	7072	62.60	1.73		
						27	6109	54.07	2.0	K 107 KF 107 KA 107 KAF107	4 4 4 4
						31	5403	47.82	2.3		
						37	4540	40.19	2.7		
						41	4121	36.48	3.0		
						47	3544	31.36	3.4		
						53	3127	27.67	3.9		
						20	8165	72.27	0.92		
						22	7409	65.58	1.01		
						26	6368	56.37	1.18		
						30	5558	49.2	1.35		
						35	4716	41.74	1.47		
						40	4121	36.48	1.64		



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
18.5kW						22kW					
46	3640	32.22	1.86			9.7	20289	99.65	0.83	K 157	6
48	3484	30.84	1.88	K 107	4	11	18817	92.42	0.90	KF 157	6
51	3230	28.59	2.1	KF 107	4	12	16237	79.75	1.04	KA 157	6
57	2931	25.94	2.3	KA 107	4	14	14330	70.38	1.18	KAF157	6
66	2519	22.30	2.7	KAF107	4	16	12424	61.02	1.36		
76	2199	19.46	3.1								
89	1865	16.51	3.6			12	16502	122.83	1.03		
						15	13388	99.65	1.26		
35	4730	41.87	0.85			16	12417	92.42	1.36		
48	3482	30.82	1.16			18	10714	79.75	1.58	K 157	4
53	3153	27.91	1.28	K 97	4	21	9456	70.38	1.79	KF 157	4
59	2796	24.75	1.45	KF 97	4	24	8198	61.02	2.1	KA 157	4
66	2527	22.37	1.60	KA 97	4	27	7294	54.29	2.3	KAF157	4
78	2142	18.96	1.9	KAF97	4	31	6286	46.79	2.7		
89	1871	16.56	2.2			39	5108	38.02	3.3		
106	1565	13.85	2.6								
123	1355	11.99	2.7			16	12015	89.43	1.02		
						18	11087	82.52	1.10		
59	2815	24.92	0.83			21	9532	70.95	1.28		
66	2532	22.41	0.85			23	8410	62.60	1.45		
76	2197	19.45	0.98			27	7264	54.07	1.68	K 127	4
84	1968	17.42	1.05	K 87	4	31	6425	47.82	1.90	KF 127	4
102	1633	14.45	1.12	KF 87	4	37	5400	40.19	2.3	KA 127	4
117	1419	12.56	1.21	KA 87	4	40	4901	36.48	2.5	KAF127	4
132	1257	11.13	1.25	KAF87	4	47	4215	31.36	2.9		
148	1125	9.96	1.32			53	3719	27.67	3.3		
178	934	8.27	1.41			61	3212	23.90	3.8		
204	812	7.19	1.50			70	2841	21.14	4.3		
22kW						26	7573	56.37	0.99		
3.3	57114	449	0.82			30	6610	49.20	1.11		
4.0	46429	365	1.01			35	5608	41.74	1.23		
5.5	34091	268	1.38	K 187R107	4	40	4901	36.48	1.38		
6.5	28875	227	1.63	KA 187R107	4	46	4329	32.22	1.56		
7.4	25313	199	1.86			48	4143	30.84	1.54	K 107	4
8.8	21370	168	2.2			51	3841	28.59	1.76	KF 107	4
						57	3485	25.94	1.94	KA 107	4
5.4	34727	273	0.87			66	2996	22.30	2.2	KAF107	4
5.9	31801	250	0.95			76	2614	19.46	2.3		
6.7	27730	218	1.08	K 167R107	4	89	2218	16.51	2.6		
7.2	25822	203	1.16	KA 167R107	4	102	1939	14.43	2.6		
7.9	23533	185	1.28			109	1815	13.51	2.9		
9.0	20734	163	1.45			125	1584	11.79	3.0		
11	17681	139	1.70			147	1343	10	3.3		
12	15392	121	2.0								
9.5	19717	155	0.86	K 157R107	4	48	4141	30.82	0.98		
12	16028	126	1.06	KF 157R107	4	53	3750	27.91	1.08		
13	13992	110	1.21	KA 157R107	4	59	3325	24.75	1.22		
				KAF157R107	4	66	3005	22.37	1.34	K 97	4
5.4	36807	180.78	1.28			78	2547	18.96	1.59	KF 97	4
6.0	32684	160.53	1.44			89	2225	16.56	1.82	KA 97	4
6.7	29427	144.53	1.60	K 187	6	106	1861	13.85	1.87	KAF97	4
7.4	26540	130.35	1.77	KA 187	6	123	1611	11.99	2.1		
8.6	23044	113.18	2.0			137	1439	10.71	2.2		
						164	1202	8.95	2.3		
8.1	24288	180.78	1.94			76	2613	19.45	0.83		
9.2	21567	160.53	2.2	K 187	4	84	2340	17.42	0.88		
10	19418	144.53	2.4	KA 187	4	102	1941	14.45	0.94	K 87	4
11	17512	130.35	2.7			117	1687	12.56	1.02	KF 87	4
						132	1495	11.13	1.05	KA 87	4
11	18070	134.5	1.66			148	1338	9.96	1.11	KAF87	4
13	14831	110.39	2.0	K 167	4	178	1111	8.27	1.18		
17	11715	87.20	2.6	KA 167	4	204	966	7.19	1.27		
19	10460	77.86	2.9								

K



MACHINERY

选型参数表
Selection Table

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
30kW						37kW					
5.5	49099	268	0.96	K 187R107 KA 187R107	4	5.5	56947	268	0.83	K 187R107 KA 187R107	4
6.5	41587	227	1.13		4	6.5	48235	227	0.97		4
7.4	36458	199	1.29		4	7.4	42285	199	1.11		4
8.8	30778	168	1.5		4	8.8	35698	168	1.32		4
6.7	39938	218	0.75	K 167R107 KA 167R107	4	8.0	39310	185	0.77	K 167R107 KA 167R107	4
7.2	37190	203	0.81		4	9.1	34635	163	0.87		4
7.9	33893	185	0.89		4	11	29536	139	1.02		4
9.0	29862	163	1.01		4	12	25711	121	1.17		4
11	25465	139	1.18		4	8.2	40572	180.78	1.16	K 187 KA 187	4
12	22168	121	1.36	K 187 KA 187	4	8.9	37268	166.06	1.26		4
8.1	33120	180.78	1.42		4	10	32436	144.53	1.45		4
8.9	30423	166.06	1.54		4	11	29395	130.98	1.60		4
10	26478	144.53	1.78		4	13	25400	113.18	1.85		4
11	23996	130.98	1.96		4	14	23046	102.69	2.0		4
13	20735	113.18	2.3		4	17	19853	88.46	2.4		4
14	18813	102.69	2.5	K 167 KA 167	4	14	24559	109.43	1.22	K 167 KA 167	4
17	16206	88.46	2.9		4	17	19646	87.54	1.53		4
13	20048	109.43	1.50		4	19	17828	78.44	1.69		4
17	15975	87.20	1.88		4	22	15301	68.18	2.0		4
19	14554	79.44	2.1		4	24	13582	60.52	2.2		4
22	12427	67.83	2.4	K 157 KF 157 KA 157 KAF157	4	35	9592	42.74	3.1	K 157 KF 157 KA 157 KAF157	4
24	11088	60.52	2.7		4	16	20741	92.42	0.82		4
15	18256	99.65	0.93		4	19	17898	79.75	0.95		4
16	16932	92.42	1.00		4	21	15795	70.38	1.07		4
18	14611	79.75	1.16		4	24	13694	61.02	1.24		4
21	12894	70.38	1.31		4	27	12184	54.29	1.39		4
24	11179	61.02	1.51		4	32	10501	46.79	1.61		4
27	9946	54.29	1.70		4	39	8533	38.02	1.98	K 127 KF 127 KA 127 KAF127	4
31	8572	46.79	1.97	K 127 KF 127 KA 127 KAF127	4	47	7025	31.30	2.4		4
39	6965	38.02	2.4		4	24	14049	62.60	0.87		4
47	5734	31.30	3.0		4	27	12135	54.07	1.01		4
21	12998	70.95	0.94		4	31	10732	47.82	1.14		4
23	11469	62.60	1.07		4	37	9020	40.19	1.35		4
27	9906	54.07	1.23		4	41	8187	36.48	1.49		4
31	8761	47.82	1.39		4	47	7040	31.36	1.74		4
37	7363	40.19	1.66	K 107 KF 107 KA 107 KAF107	4	53	6212	27.67	1.97		4
40	6683	36.48	1.83		4	62	5366	23.90	2.3		4
47	5747	31.36	2.1		4	70	4747	21.14	2.6		4
53	5071	27.67	2.4		4	83	3988	17.77	2.8		4
61	4380	23.90	2.8		4	103	3220	14.35	3.1		4
35	7647	41.74	0.90	K 107 KF 107 KA 107 KAF107	4	116	2870	12.78	3.1		4
40	6683	36.48	1.01		4	138	2410	10.74	3.5		4
46	5903	32.22	1.08		4	171	1948	8.68	3.5		4
51	5238	28.59	1.29		4	41	8187	36.48	0.83	K 107 KF 107 KA 107 KAF107	4
57	4752	25.94	1.42		4	48	6921	30.84	0.92		4
66	4085	22.30	1.63		4	52	6416	28.59	1.05		4
76	3565	19.46	1.66		4	57	5822	25.94	1.16		4
89	3025	16.51	1.87		4	66	5005	22.3	1.33		4
102	2644	14.43	1.90		4	76	4367	19.46	1.35		4
109	2475	13.51	2.15		4	90	3705	16.51	1.53		4
125	2160	11.79	2.19		4	103	3238	14.43	1.55		4
147	1832	10.00	2.39		4	110	3032	13.51	1.75		4
168	1601	8.74	2.45		4	126	2646	11.79	1.79		4
59	4534	24.75	0.89	K 97 KF 97 KA 97 KAF97	4	148	2244	10.00	1.82		4
66	4098	22.37	0.99		4	169	1961	8.74	1.95		4
78	3474	18.96	1.16		4						
89	3034	16.56	1.33		4						
106	2537	13.85	1.59		4						
123	2197	11.99	1.66		4						
137	1962	10.71	1.37		4						
164	1640	8.95	1.52								



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
45kW						55kW					
6.5	58664	227	0.80	K 187R107	4	17	29204	87.54	1.03		
7.4	51428	199	0.91	KA 187R107	4	19	25974	77.86	1.16		
8.8	43416	168	1.08			22	22745	68.18	1.32	K 167	4
						24	20263	60.74	1.48	KA 167	4
11	35922	139	0.84	K 167R107	4	29	17207	51.58	1.75		
12	31270	121	0.96	KA 167R107	4	35	14258	42.74	2.1		
						41	12170	36.48	2.5		
8.2	49344	180.78	0.95			24	20357	61.02	0.83		
8.9	45326	166.06	1.04			27	18111	54.29	0.93		
10	39449	144.53	1.19			32	15609	46.79	1.08		
11	35751	130.98	1.31	K 187	4	39	12684	38.02	1.33		
13	30892	113.18	1.52	KA 187	4	47	10442	31.30	1.62	K 157	4
14	28029	102.69	1.68			54	9214	27.62	1.84	KF 157	4
17	24145	88.46	1.9			62	7990	23.95	2.1	KA 157	4
20	20291	74.34	2.3			69	7109	21.31	2.4	KAF157	4
						81	6128	18.37	2.8		
14	29869	109.43	1.01			99	4977	14.92	3.4		
17	23894	87.54	1.26			117	4220	12.65	3.8		
19	21683	79.44	1.42	K 167	4						
22	18610	68.18	1.62	KA 167	4	37	13408	40.19	0.91		
24	16519	60.52	1.82			47	10465	31.36	1.17		
29	14079	51.58	2.1			53	9234	27.67	1.32		
35	11666	42.74	2.6			62	7976	23.90	1.53	K 127	4
						70	7056	21.14	1.73	KF 127	4
21	19210	70.38	0.88			83	5928	17.77	2.06	KA 127	4
24	16655	61.02	1.02			103	4787	14.35	2.38	KAF127	4
27	14818	54.29	1.14			116	4267	12.78	1.88		
32	12771	46.79	1.32	K 157	4	138	3583	10.74	2.1		
39	10378	38.02	1.63	KF 157	4	171	2896	8.68	2.3		
47	8543	31.30	2.0	KA 157	4						
54	7539	27.62	2.2	KAF157	4						
62	6537	23.95	2.6								
69	5817	21.31	2.9								
81	5014	18.37	3.4								
						75kW					
31	13052	47.82	0.94			11	59298	130.35	0.79		
37	10970	40.19	1.11			13	52224	114.80	0.90		
41	9957	36.48	1.23			14	47016	103.35	1.00	K 187	4
47	8562	31.36	1.43			17	40242	88.46	1.17	KA 187	4
53	7555	27.67	1.62	K 127	4	20	33818	74.34	1.39		
62	6526	23.90	1.87	KF 127	4	23	29283	64.37	1.61		
70	5773	21.14	2.1	KA 127	4	28	24402	53.64	1.9		
83	4850	17.77	2.3	KAF127	4	32	20803	45.73	2.3		
103	3917	14.35	2.5								
116	3491	12.78	2.6			19	35420	77.86	0.85		
138	2931	10.74	2.8			22	30857	67.83	0.97		
171	2369	8.68	2.9			24	27531	60.52	1.09		
						29	23496	51.65	1.28		
52	7804	28.59	0.87			34	19598	43.08	1.53	K 167	4
57	7080	25.94	0.96			41	16595	36.48	1.81	KA 167	4
66	6087	22.30	1.10			46	14616	32.13	2.1		
76	5312	19.46	1.11	K 107	4	52	13042	28.67	2.3		
90	4506	16.51	1.26	KF 107	4	61	11114	24.43	2.7		
103	3939	14.43	1.44	KA 107	4						
110	3688	13.51	1.47	KAF107	4	39	17296	38.02	0.98		
126	3218	11.79	1.55			47	14239	31.30	1.19		
148	2729	10.00	1.60			54	12565	27.62	1.35	K 157	4
169	2386	8.74	1.64			62	10895	23.95	1.55	KF 157	4
						69	9694	21.31	1.75	KA 157	4
						81	8357	18.37	2.0	KAF157	4
						99	6787	14.92	2.5		
						117	5755	12.65	2.9		
55kW						47	14271	31.36	0.86		
10	45904	145.33	1.02			53	12592	27.67	0.97		
11	41371	130.98	1.14			62	10877	23.90	1.12	K 127	4
13	36261	114.80	1.30	K 187	4	70	9621	21.14	1.27	KF 127	4
14	32436	102.69	1.45	KA 187	4	83	8084	17.77	1.36	KA 127	4
17	29511	88.46	1.59			103	6528	14.35	1.51	KAF127	4
20	24800	74.34	1.90			114	5900	12.78	1.54		
23	21474	64.37	2.19			138	4886	10.74	1.72		
						171	3949	8.68	1.74		

K



GELUFU

选型参数表
Selection Table

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
90kW						132kW					
14	56058	102.69	0.84			20	59121	74.34	0.79		
16	51134	93.67	0.92			23	51192	64.37	0.92		
19	42242	77.38	1.11			28	42659	53.64	1.10		
23	35139	64.37	1.34	K 187	4	31	38499	48.41	1.22	K 187	4
28	29282	53.64	1.61	KA 187	4	34	34666	43.59	1.36	KA 187	4
31	26427	48.41	1.8			38	30841	38.78	1.52		
34	23796	43.59	2.0			45	26570	33.41	1.77		
38	21170	38.78	2.2			53	22331	28.08	2.1		
						61	19333	24.31	2.3		
						74	16112	20.26	2.6		
						86	13734	17.27	2.8		
22	37028	67.83	0.81			35	33990	42.74	0.88		
24	33038	60.52	0.91			41	29012	36.48	1.04		
29	28157	51.58	1.07			46	25942	32.62	1.16	K 167	4
35	23332	42.74	1.29	K 167	4	54	22053	27.73	1.36	KA 167	4
40	19953	36.55	1.51	KA 167	4	61	19429	24.43	1.55		
45	17807	32.62	1.69			74	16104	20.25	1.87		
52	15651	28.67	1.92			86	13742	17.28	2.2		
61	13336	24.43	2.3								
73	11054	20.25	2.7			62	19047	23.95	0.89	K 157	4
86	9433	17.28	3.2			70	16947	21.31	1.00	KF 157	4
						81	14609	18.37	1.16	KA 157	4
39	20755	38.02	0.82			100	11866	14.92	1.43	KAF157	4
47	17087	31.30	0.99			118	10060	12.65	1.59		
54	15078	27.62	1.12	K 157	4	160kW					
62	13074	23.95	1.29	KF 157	4	28	51708	53.64	0.91		
69	11633	21.31	1.45	KA 157	4	33	44082	45.73	1.07		
81	10028	18.37	1.69	KAF157	4	42	34096	35.37	1.38		
99	8145	14.92	2.1			47	30693	31.84	1.53	K 187	4
117	6906	12.65	2.5			61	23434	24.31	1.9	KA 187	4
						74	19530	20.26	2.1		
62	13052	23.90	0.94			86	16648	17.27	2.3		
70	11546	21.14	1.06			41	35166	36.48	0.86		
83	9701	17.77	1.15	K 127	4	62	23338	24.21	1.29	K 167	4
103	7834	14.35	1.26	KF 127	4	73	19800	20.54	1.52	KA 167	4
116	6982	12.78	1.28	KA 127	4	86	16657	17.28	1.81		
138	5863	10.74	1.43	KAF127	4						
171	4738	8.68	1.45			81	17708	18.37	0.96	K 157	4
110kW						100	14382	14.92	1.18	KF 157	4
17	58625	88.46	0.80			118	12194	12.65	1.39	KA 157	4
20	49267	74.34	0.95							KAF157	4
21	46173	69.67	1.02			200kW					
24	41853	63.14	1.12	K 187	4	33	55103	45.73	0.85		
33	30307	45.73	1.55	KA 187	4	45	40258	33.41	1.17		
35	28332	42.75	1.66			47	38366	31.84	1.23	K 187	4
38	26178	39.50	1.80			59	30618	25.41	1.54	KA 187	4
42	23441	35.37	2.0			74	24413	20.26	1.69		
53	18610	28.08	2.5			86	20810	17.27	1.87		
						61	29437	24.43	1.02		
29	34184	51.58	0.88			73	24750	20.54	1.22	K 167	4
35	28325	42.74	1.06			86	20906	17.35	1.44	KA 167	4
41	24176	36.48	1.24								
46	21618	32.62	1.39	K 167	4	100	17978	14.92	0.94	K 157	4
54	18378	27.73	1.64	KA 167	4	118	15243	12.65	1.05	KF 157	4
61	16191	24.43	1.86							KA 157	4
74	13420	20.25	2.2							KAF157	4
86	11452	17.28	2.6								
60	15872	23.95	1.07	K 157	4						
70	14123	21.31	1.20	KF 157	4						
81	12174	18.37	1.39	KA 157	4						
100	9888	14.92	1.71	KAF157	4						
118	8384	12.65	2.0								



Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	
200	5.0	279	K 37R17 KF 37R17 KA 37R17 KAF37R17	0.18	1550	1.0	1388	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.25	
	5.2	267				1.1	1218			
	5.9	234				1.3	1053			
	6.8	205				1.5	924			
	7.7	181		0.37		1.7	815			
	8.7	160				2.0	709			
	10	136				2.2	622			
	11	127				2.5	552			
	0.37	13		110		2.9	485			
		14		96		3.2	428			
400		2.5	552	K 47R37 KF 47R37 KA 47R37 KAF47R37		0.18			3.9	358
		2.8	495						4.3	320
	3.3	416	4.9						283	
	3.7	375	5.7						246	
	4.3	326	0.25		2700	0.34	4037	0.18		
	4.8	289				0.39	3609			
	5.6	250				0.45	3107			
	6.3	219				0.51	2728			
	7.2	193	0.37			0.59	2371	0.25		
	8.3	167				0.67	2088			
9.3	149	0.75				1854				
11	128	0.84				1658				
600	1.5	906	K 57R37 KF 57R37 KA 57R37 KAF57R37	0.18		0.98	1415	0.37		
	1.7	806				1.1	1229			
	2.0	699				1.3	1078	0.55		
	2.3	615				1.5	951			
	2.6	544		0.25		1.7	837			
	2.9	473				1.9	726	0.75		
	3.3	421				2.2	638			
	3.8	362				2.5	562			
	4.4	319		0.37		3.0	474	1.1		
	5.1	273				3.3	426			
820	5.8	240		0.55		3.8	373	1.5		
	6.5	215				4.2	330			
	7.2	192				4.8	293	2.2		
	8.4	166				5.6	250			
	9.9	141	K 67R37 KF 67R37 KA 67R37 KAF67R37	0.75		5.9	236			
	11	126				7.0	201			
	13	108		1.10	4300	0.23	6027	0.18		
	15	95				0.26	5392			
1550	1.2	1171		0.18		0.30	4669			
	1.3	1034				0.34	4082	0.25		
	1.5	903				0.39	3583			
	1.8	793				0.45	3108			
	2.0	697		0.25		0.51	2757	0.37		
	2.3	613				0.58	2419			
	2.6	542				0.66	2123			
	3.0	471				0.75	1856	0.55		
	3.3	420		0.37		0.86	1625			
	3.9	361				0.98	1430			
4.3	323	1.1				1261				
1550	5.1	272		0.55		1.3	1102	0.75		
	5.8	240				1.5	957			
	6.4	217				1.6	855	1.1		
	7.3	191		0.75		1.9	743			
	0.59	2370				2.1	651			
	0.68	2050				2.4	573	1.5		
	0.78	1772				2.8	504			
	0.92	1514				3.2	437			
						3.6	382	2.2		
						4.1	342			

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。

The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.



MACHINERY

选型参数表
Selection Table

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	
4300	4.6	305	K 97R57	3.0	13000	1.5	899	K 127R77	3.0	
	5.4	258	KF 97R57			1.8	790			KF 127R77
	6.0	232	KA 97R57			2.0	690			
	7.1	199	KAF97R57	4.0		2.3	599	KAF127R77	4.0	
8000	0.13	10528	K 107R77 KF 107R77 KA 107R77 KAF107R77	0.18		3.0	468			K 127R87
	0.15	9391				3.4	410	KF 127R87		
	0.17	8211				2.6	536		KA 127R87	
	0.19	7167		0.25		2.9	473	KAF127R87		7.5
	0.23	6097				3.3	418			
	0.25	5582				0.37	3.8	367	KAF127R87	
	0.27	5065		4.2			330			
	0.32	4299		4.8			290			
	0.37	3757		0.55		0.08	17679	K 157R97 KF 157R97 KA 157R97 KAF157R97	0.55	
	0.43	3236			0.09	15729				
	0.48	2869			0.10	14721				
	0.56	2504		0.11	13097					
	0.63	2203		0.12	11368					
	0.74	1869		0.14	10114					
	0.83	1689		0.16	8718					
	0.91	1533		0.18	7734					
	1.1	1317		1.1	0.27	5074				
	1.2	1150			0.31	4514				
	1.4	1015			0.35	3974				
	1.6	871		2.2	0.40	3516				
	1.8	782			0.46	3047				
	2.0	686			0.48	2899				
	2.3	606		3.0	0.60	2319				
	2.7	515			0.69	2026				
	3.1	455			0.77	1802				
	3.6	402		4.0	0.83	1680				
	4.1	351			1.0	1365				
	4.7	307			1.1	1229				
	5.2	277		5.5	1.3	1093				
	5.9	243			1.5	942				
0.08	17550	1.6	854							
13000	0.09	16006	K 127R77 KF 127R77 KA 127R77 KAF127R77	0.18	1.8	756	K 157R107	11		
	0.10	14975			2.1	661			KF 157R107	
	0.11	12440			2.5	565				KA 157R107
	0.13	10914		0.25	2.9	503	KAF157R107	15		
	0.14	9819			3.3	433				
	0.16	8443			0.37	5.0	290	K 167R97 KA 167R97	0.55	
	0.19	7483		4.8		307	KF 167R97			
	0.21	6565		5.6		260				KA 167R97
	0.24	5804		0.55	6.2	237	KAF167R97			
	0.28	5027			7.0	210				
	0.31	4423			0.75	0.07	19653	K 167R97	0.75	
	0.37	3801		0.08		17345	KA 167R97			
	0.43	3237		0.09		14945				
	0.47	2941		1.1	0.11	13190	KAF167R97			
	0.55	2548			0.12	11532				
	0.63	2218			1.5	0.14	10227	KAF167R97		
	0.72	1926		0.16		8597				
	0.79	1757		2.2		0.21	6538	KAF167R97		
	0.90	1541			0.26	5366				
	1.0	1342			32000	0.29	4798	KAF167R97		
1.2	1177	0.34	4059							
1.4	1025									

表上所配功率均有超载,按实际条件确定的转矩不得大于减速机额定转矩。

The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.



Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p
32000	0.42	3359	K 167R97 KA 167R97	2.2	50000	2.0	720	K 187R107 KA 187R107	15
	0.52	2741				2.4	614		
	0.63	2252		3		2.9	514		18.5
	0.65	2174				3.3	449		30
	0.85	1698		4		4.0	365		37
	1.0	1402				5.5	268		
	1.1	1291		5.5		6.5	227		45
	1.3	1101				7.4	199		
	1.5	944		7.5		8.8	168		
	1.7	843							
	1.9	757							
	2.6	561	K 167R107 KA 167R107	11					
	3.0	479							
	3.4	422		15					
	3.9	367							
	4.7	313		18.5					
	5.4	273		22					
	5.9	250							
	6.7	218		30					
	7.2	203							
	7.9	185		37					
	9.0	163		45					
	11	139							
	12	121							
50000	0.04	32625	K 187R97 KA 187R97	0.55					
	0.05	27165							
	0.06	24353							
	0.07	19144							
	0.08	16978							
	0.10	14272		0.75					
	0.11	13116							
	0.12	11647							
	0.13	10413		1.1					
	0.15	9363							
	0.17	8126							
	0.19	7333	K 187R97 KA 187R97	1.5					
	0.21	6738							
	0.24	5984							
	0.27	5350		2.2					
	0.30	4810							
	0.33	4364		3					
	0.39	3609							
	0.46	3062							
	0.56	2519		4					
	0.63	2268							
	0.69	2054							
	0.78	1821	K 187R97 KA 187R97	5.5					
	0.88	1605							
	1.0	1395		7.5					
	1.2	1196							
	2.0	737		15					
	2.4	619							
	2.8	524		18.5					








K

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。

The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.



Mounting Dimension Sheets-overview

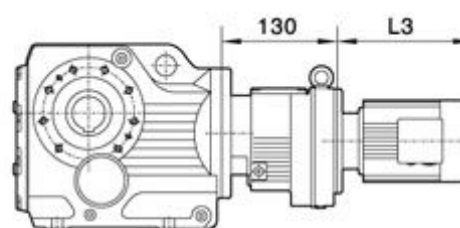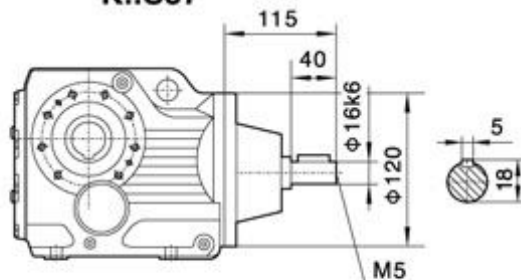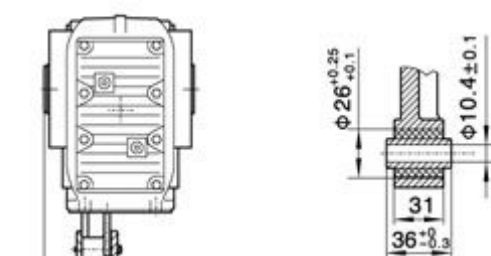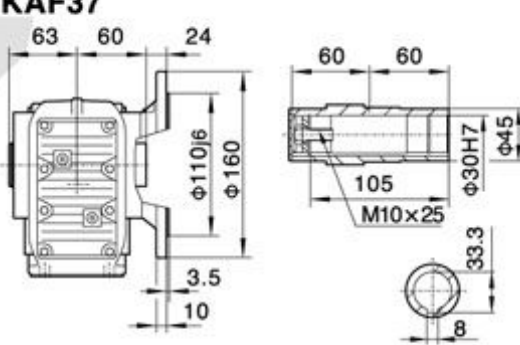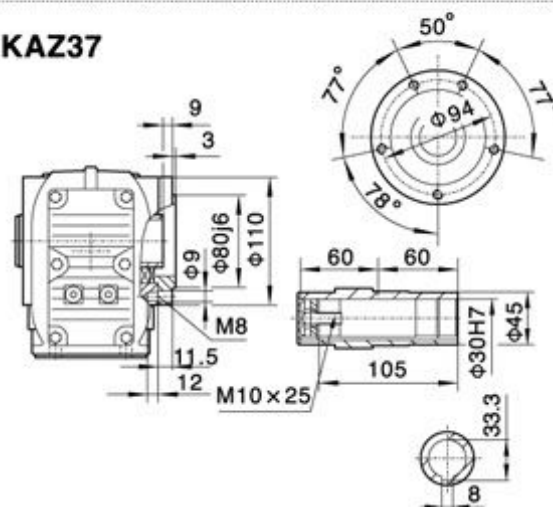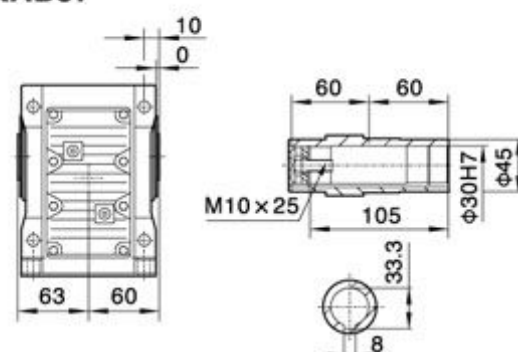

注:其余尺寸见
相对应结构
形式

Note:For other values please refer to the opposite structure.










When equipping the user's motor or the special one, the flange is required to be connected.

Y2电机机座号 Motor size	63	71		80		90S	90L	100					
功率/4P Power/(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0				
L3	235	245		278		304	328	340					
G	130	145		175		195	195	215					
L2	71	71		71		71	71	93					




注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB。

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.

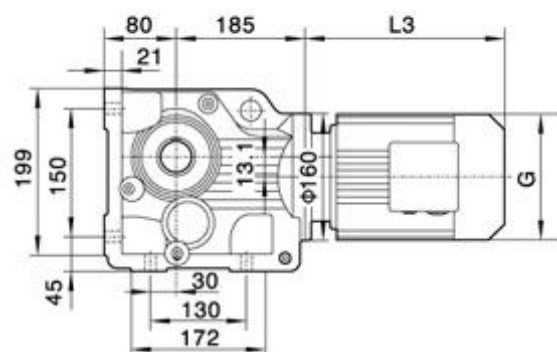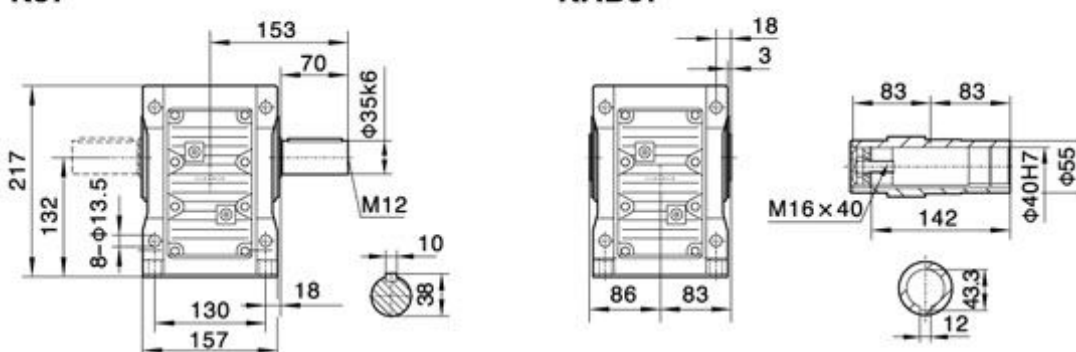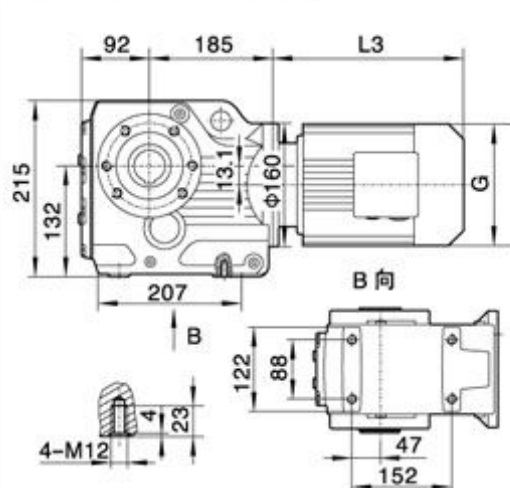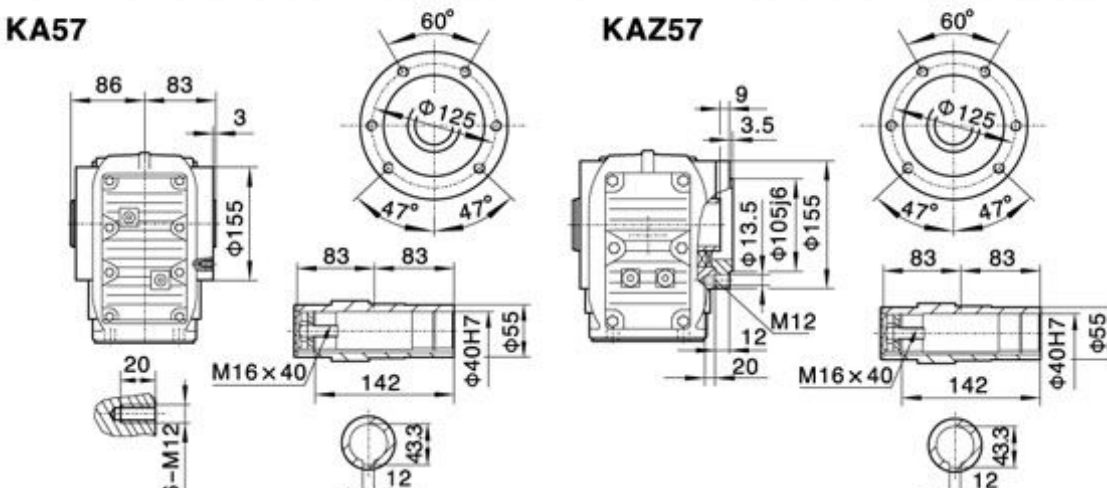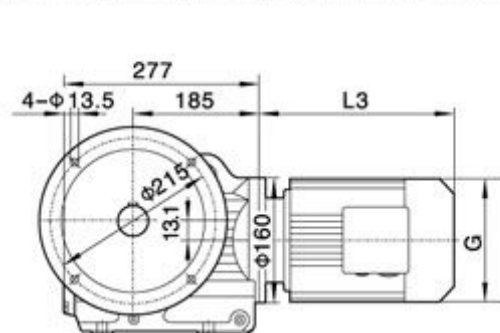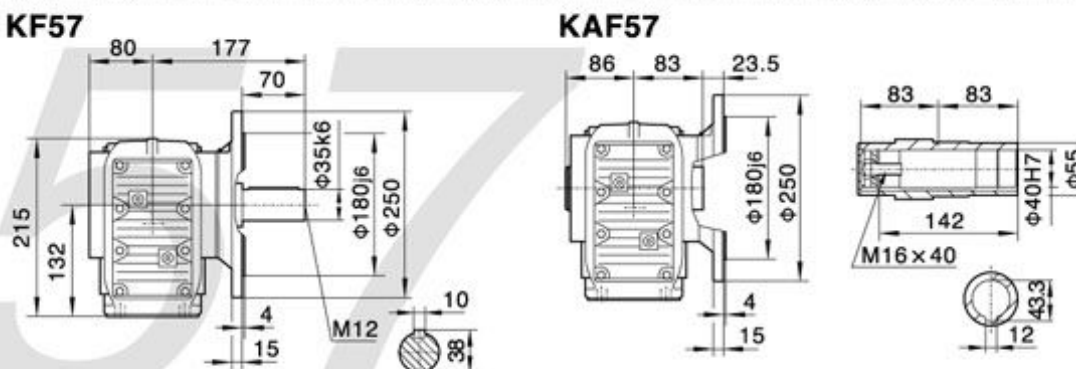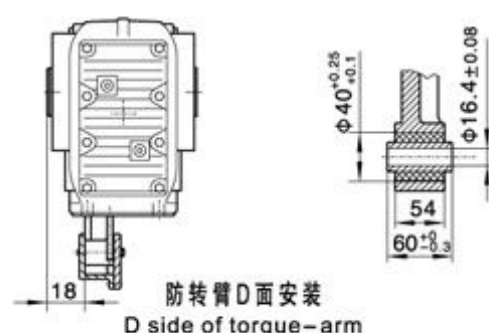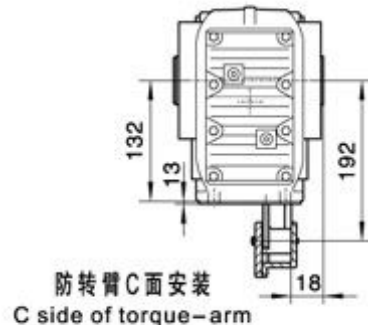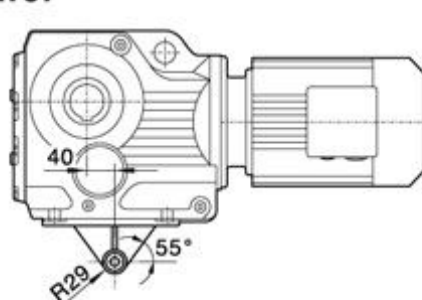

K
K57

KAB57

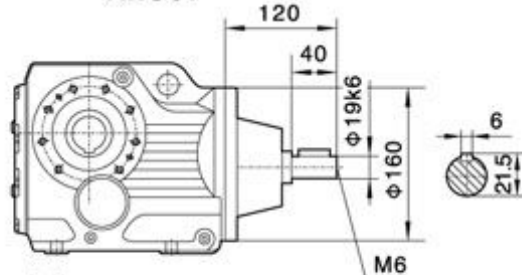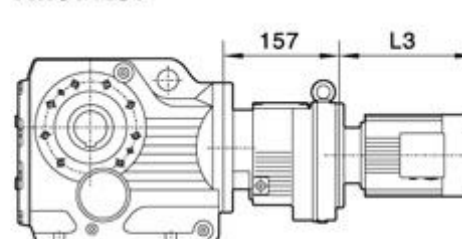KA57

KAZ57

KF57

KAF57

KAT57


电机需方配或配特殊电机时
需加联接法兰


K..S37

K..57R37


注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to connected.

Y ₂ 电机机座号 Motor size	63	71	80	90S	90L	100	112M	132S		
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5		
L3	223	245	278	304	328	350	380	425		
G	130	145	175	195	195	215	240	275		
L2	81	81	81	81	81	93	93	101		


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.





K



K67

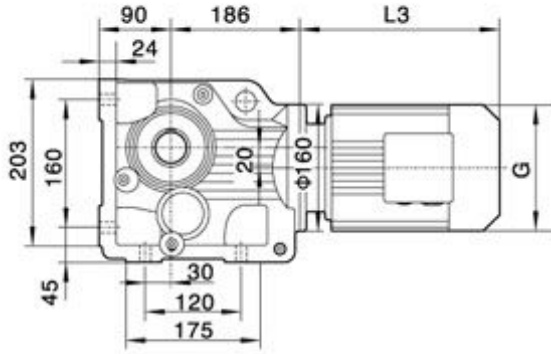


KAB67

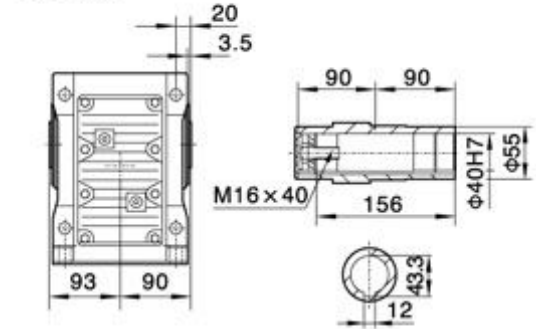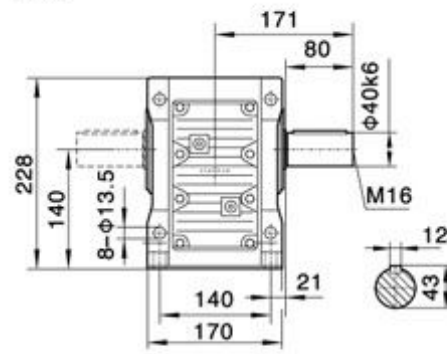



KA67

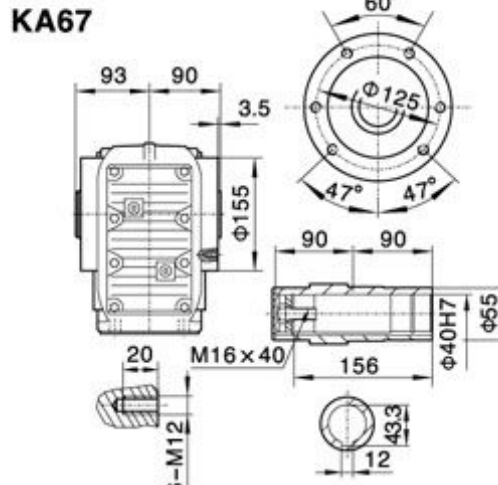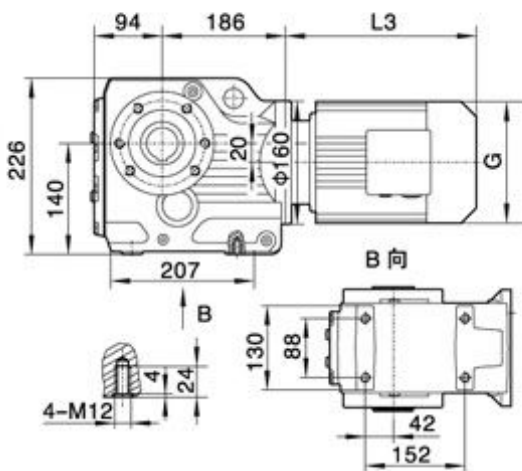


KAZ67

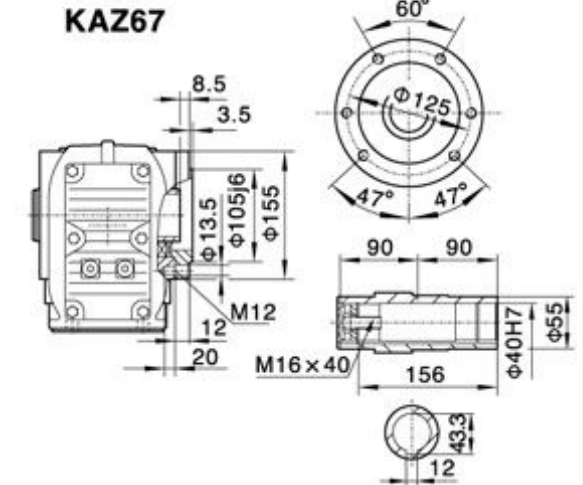



KF67

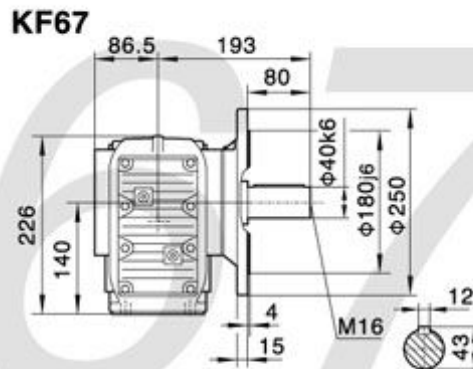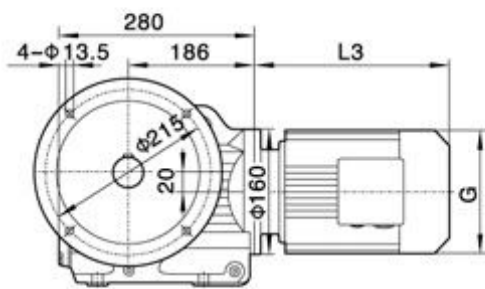


KAF67

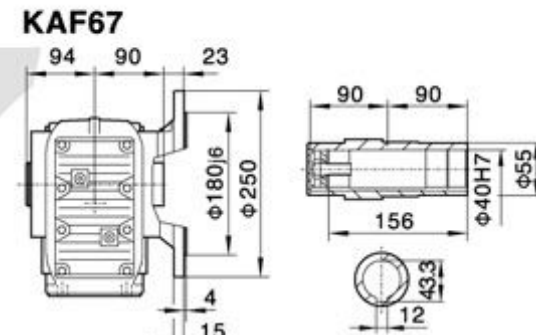

KAT67

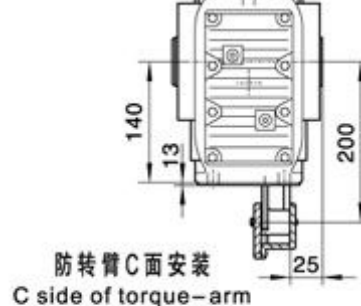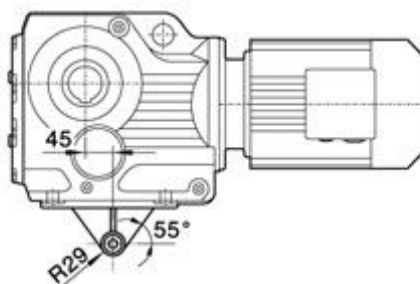


防转臂C面安装
C side of torque-arm

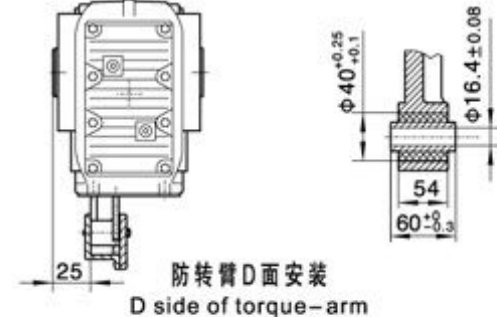


防转臂D面安装
D side of torque-arm


电机需方配或配特殊电机时
需加联接法兰



K..S67

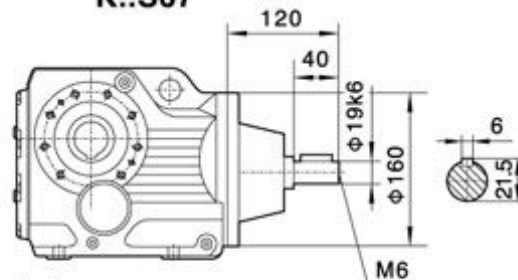

K..67R37

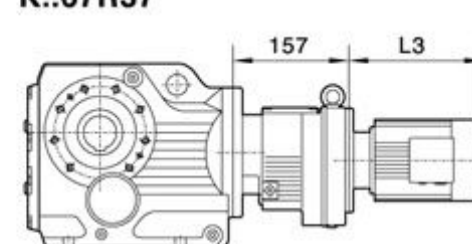

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to connected.





Y2电机机座号 Motor size	63	71	80	90S	90L	100	112M	132S		
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5		
L3	223	245	278	304	328	350	380	425		
G	130	145	175	195	195	215	240	275		
L2	81	81	81	81	81	93	93	101		

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.



Mounting Dimension Sheets-overview

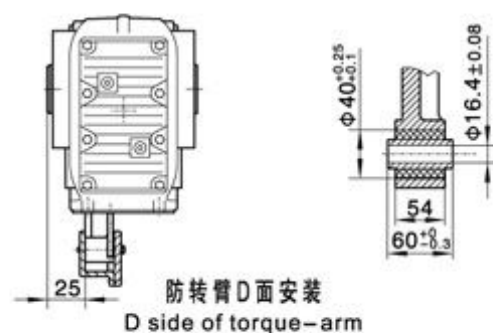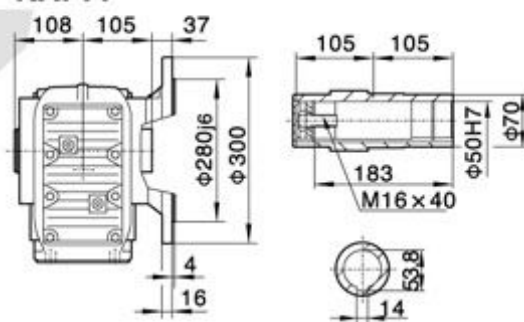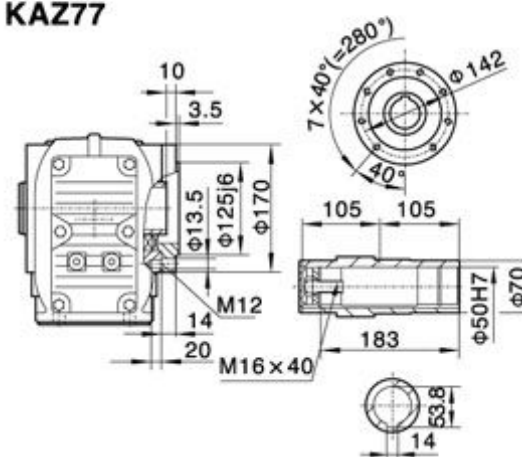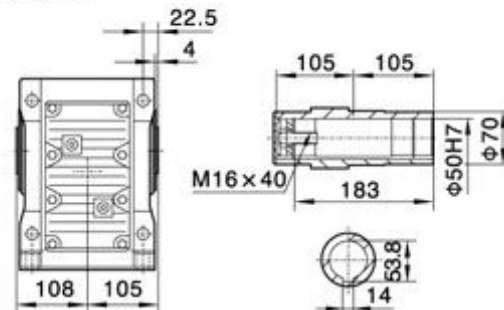


Technical drawing of the motor assembly showing dimensions 157 and L3.


Note: For other values please refer to the opposed structure.

Y2电机机座号 Motor size	71	80		90S	90L	100		112M	132S	132M	160M
功率/4P Power/(kW)	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11
L3	233	278		304	328	350		380	425	461	524
G	145	175		195	195	215		240	275	275	330
L2	81	81		81	81	93		93	101	101	126



Note:1.The housings of KA, KF, KAF, KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K, KA, KF, KAF, KAZ, KAB.

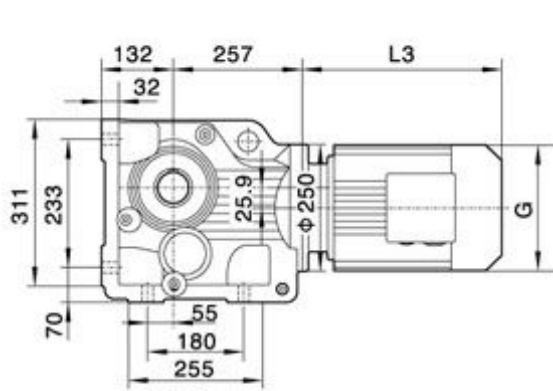


K87

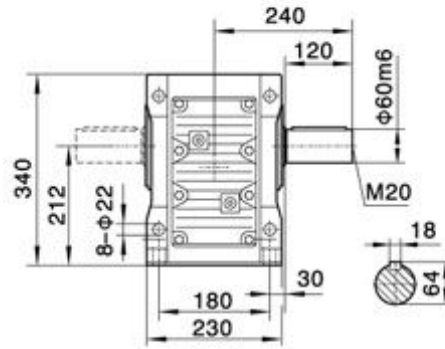



KAB87

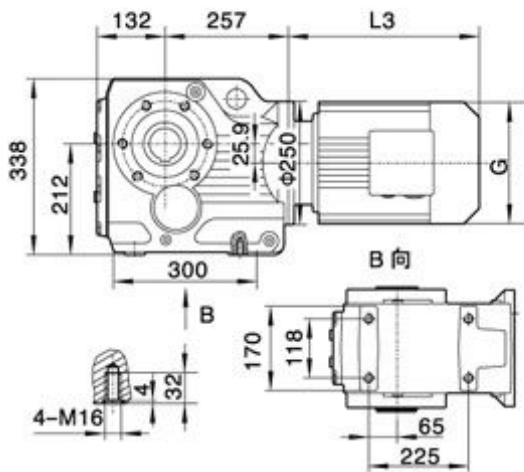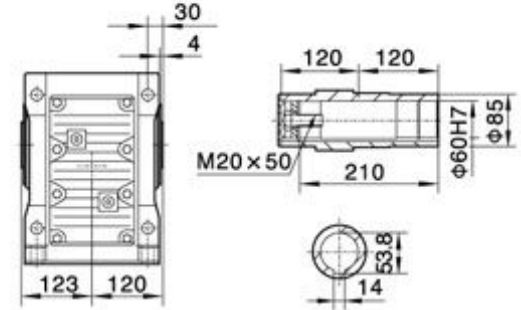


KA87

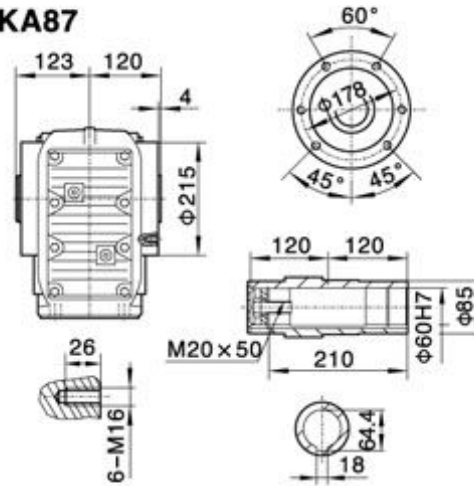


KAZ87

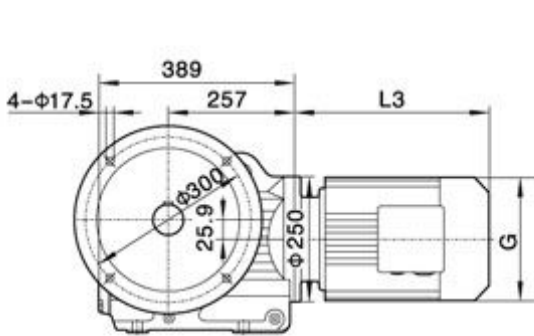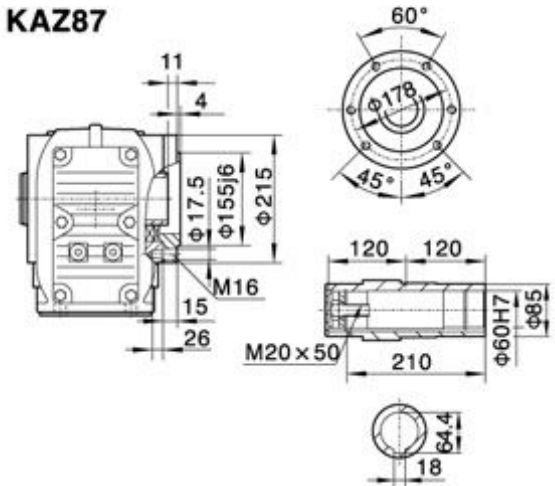


KF87

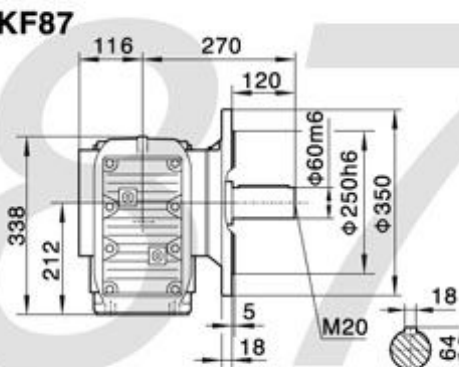



KAF87

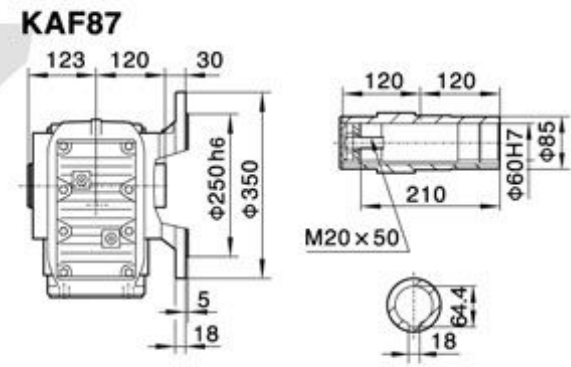


KAT87

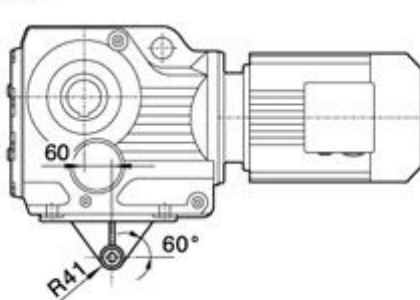


防转臂C面安装
C side of torque-arm




防转臂D面安装
D side of torque-arm




电机需方配或配特殊电机时
需加联接法兰



K..S87

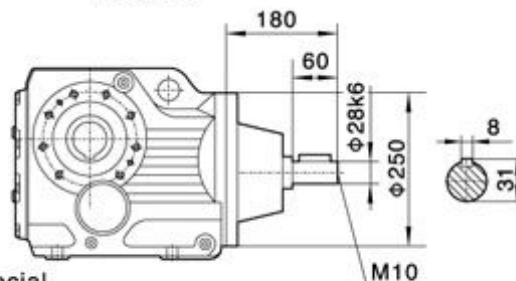

K..87R57

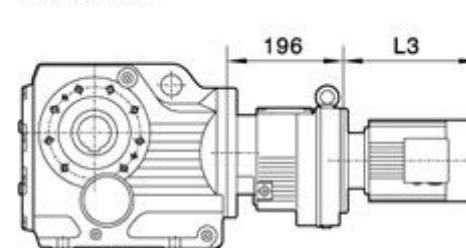

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机机座号 Motor size	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L
功率/4P Power/(kW)	0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22
L3	246	280	304	350	380	425	461	524	547	583	616
G	175	195	195	215	240	275	275	330	330	380	380
L2	86	86	86	71	71	101	101	126	126	126	126

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.




GELUFU


外形安装尺寸 Mounting Dimension Sheets-overview

K



K97

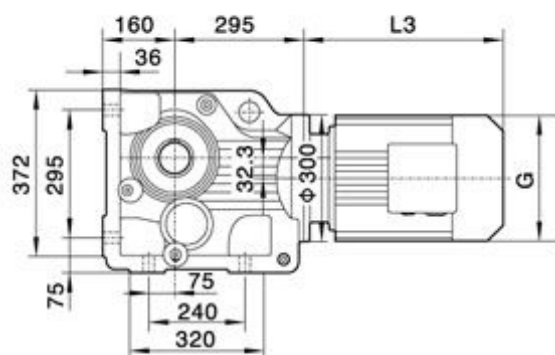


KAB97

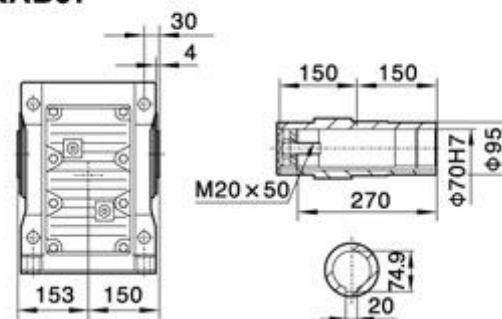



KA97

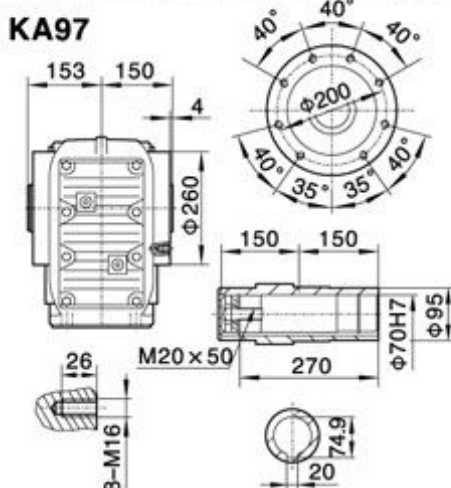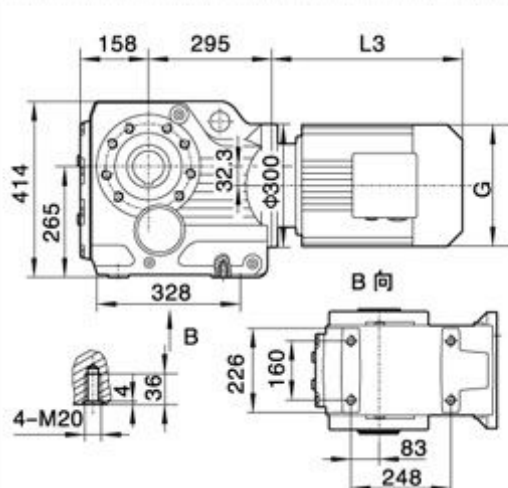


KAZ97

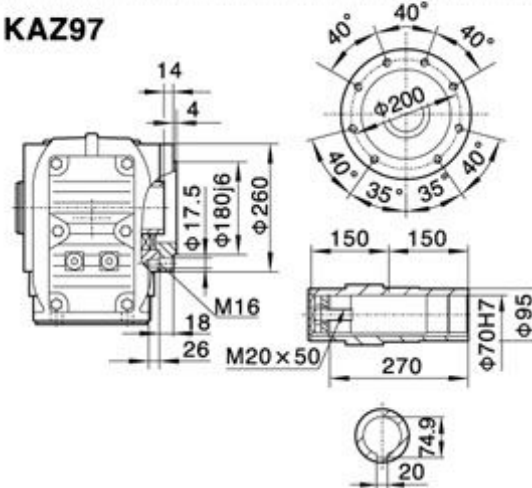



KF97

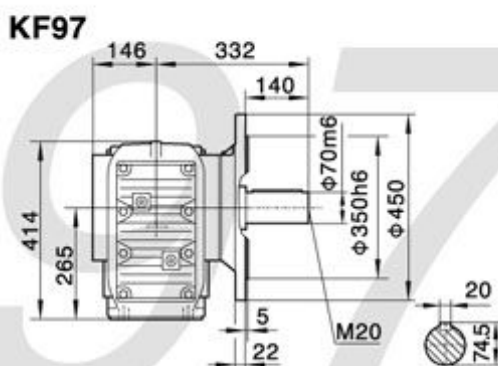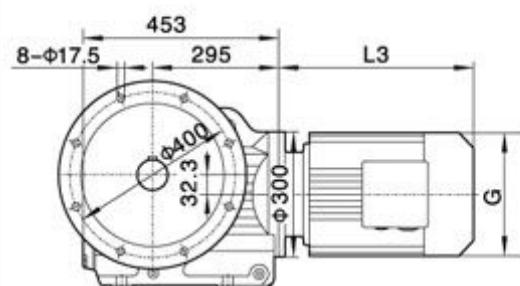


KAF97

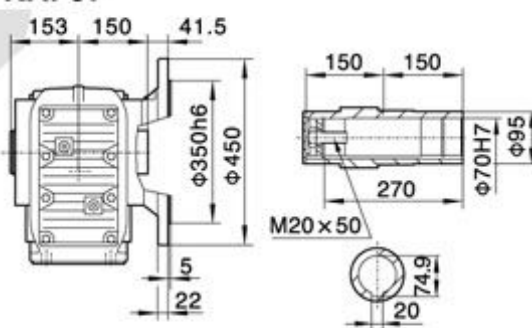

KAT97

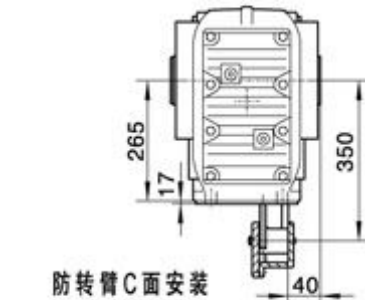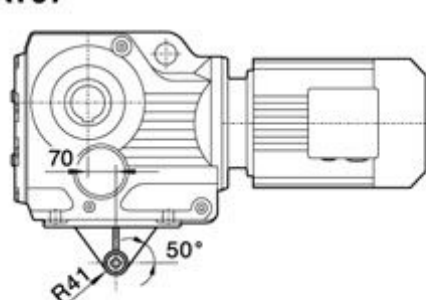


防转臂C面安装
C side of torque-arm

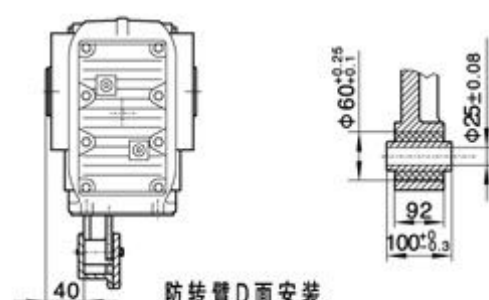


防转臂D面安装
D side of torque-arm


电机需配或配特殊电机时
需加联接法兰



K..S97

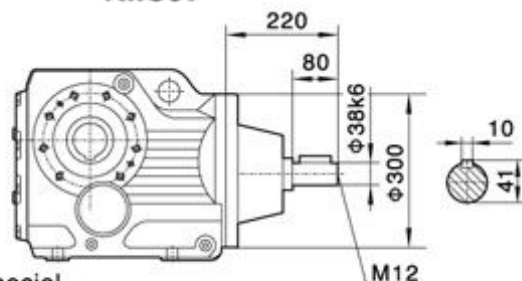

K..97R57

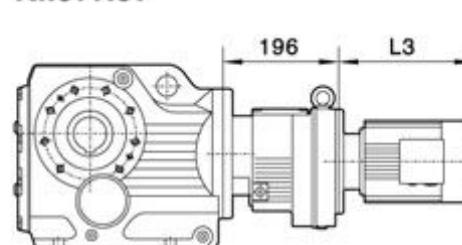

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to connected.

Y2电机机座号 Motor size	90S	90L	100		112M	132S	132M	160M	160L	180M	180L	200
功率/4P Power/(kW)	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	18.5	22	30
L3	280	304	315		334	425	461	524	547	555	588	652
G	195	195	215		240	275	275	330	330	380	380	420
L2	86	86	101		101	101	101	126	126	126	126	132


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.



K107

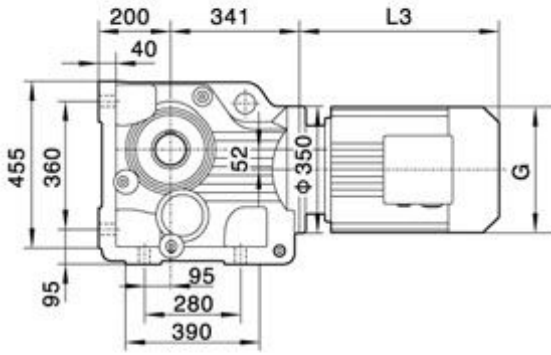


KAB107

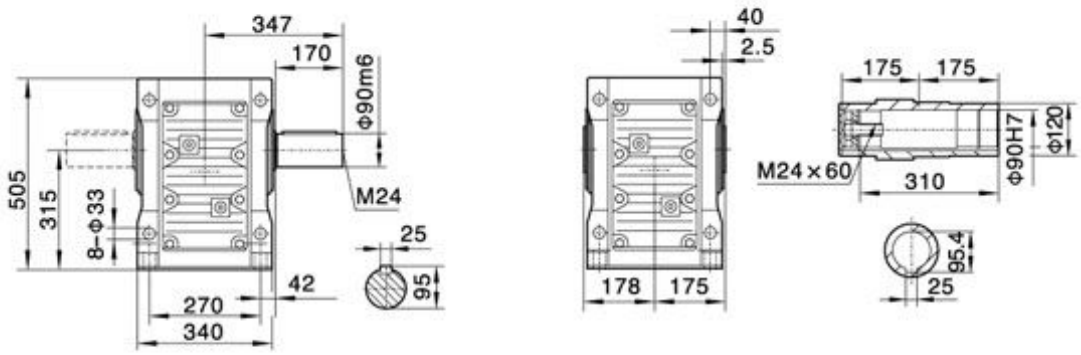



KA107

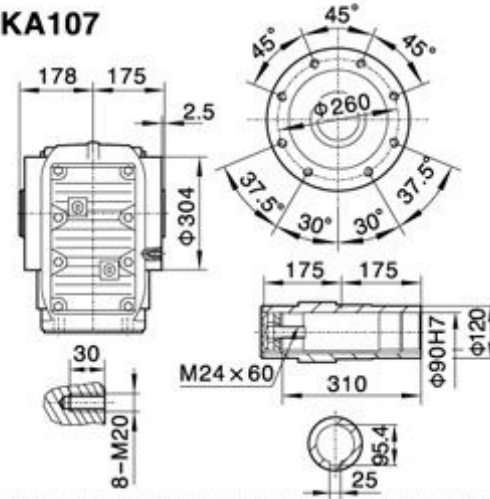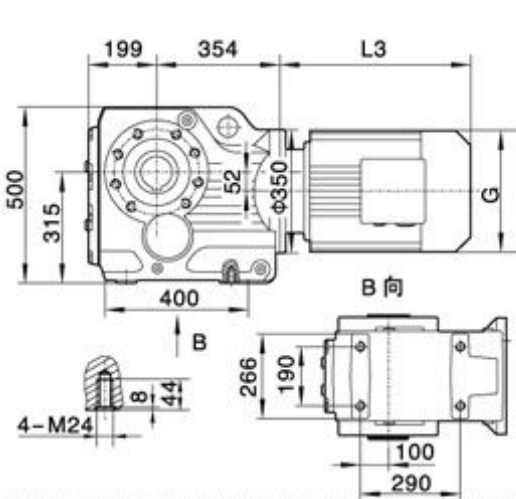


KAZ107

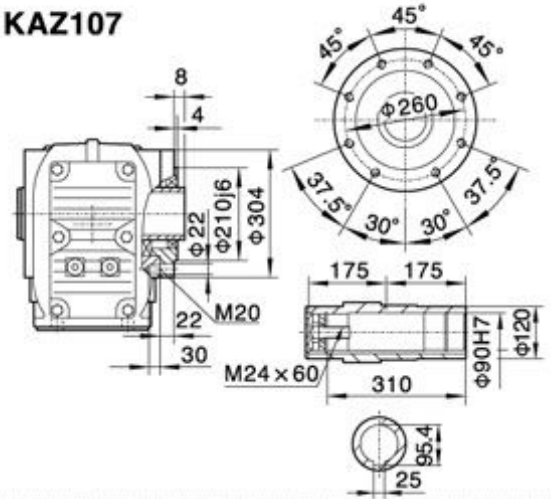




KF107

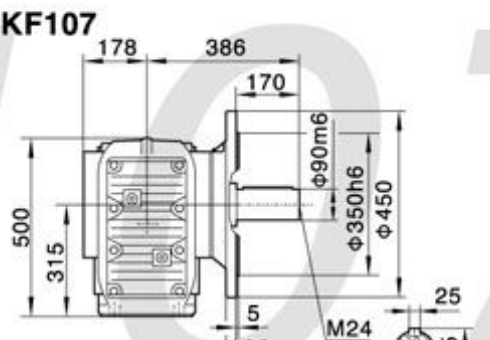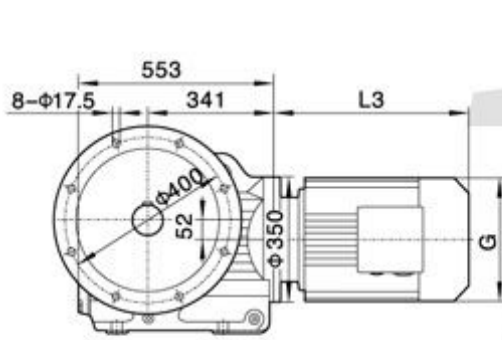


KAF107

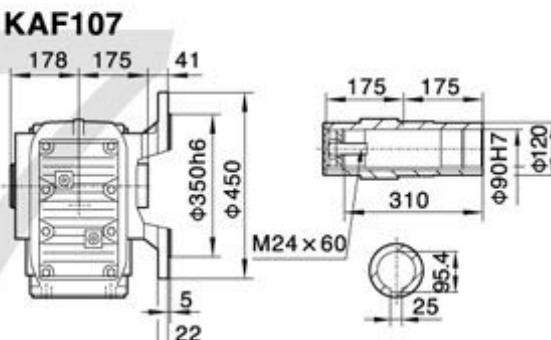


KAT107

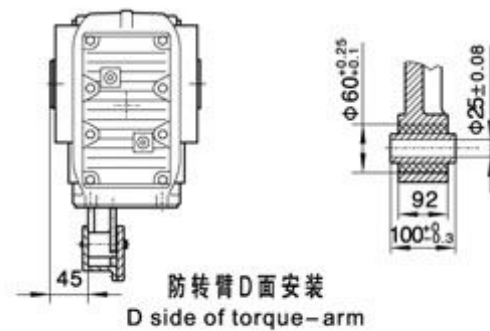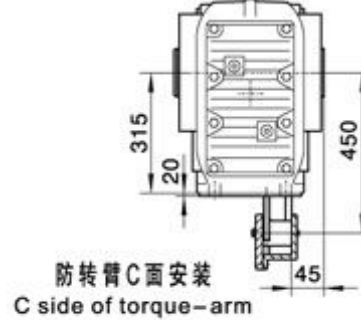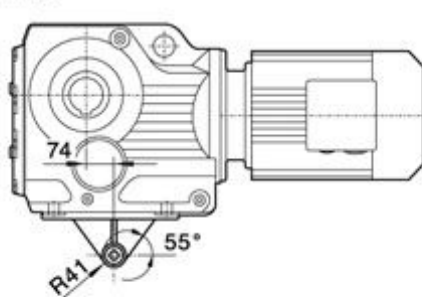


电机需方配或配特殊电机时需加联接法兰



K..S107

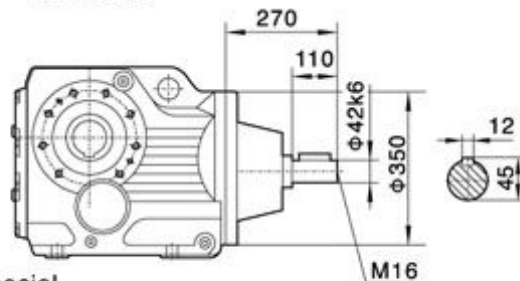

K..107R77

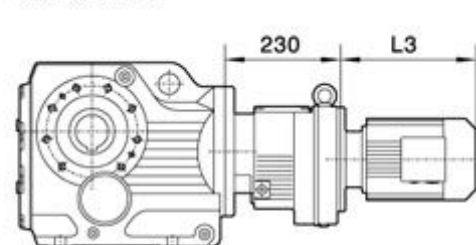

注:其余尺寸见相对应结构形式
Note:For other values please refer to the opposite structure.

When equipping the user's motor or the special one, the flange is required to be connected.


Y2电机机座号 Motor size	100	112M	132S	132M	160M	160L	180M	180L	200	225S	225M
功率/4P Power/(kW)	3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45
L3	318	334	386	422	504	519	555	588	654	680	702
G	215	240	275	275	330	330	380	380	420	470	470
L2	101	101	101	101	126	126	126	126	132	132	132

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.



Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.

K


K127

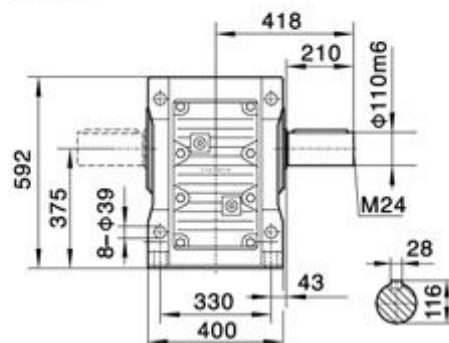


KA(KAB)127

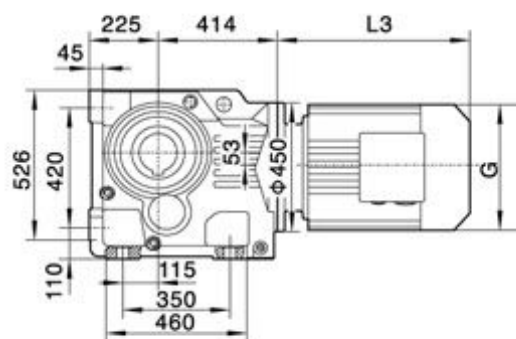



KAZ127

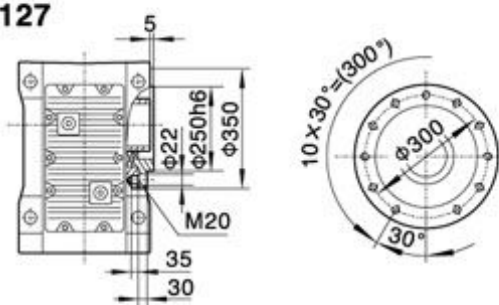


KA127/KAF127/KAZ127
空心轴/Hollow shaft






KF127

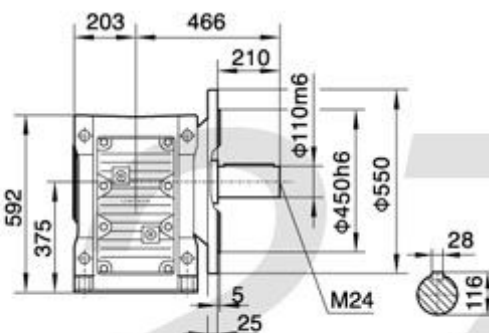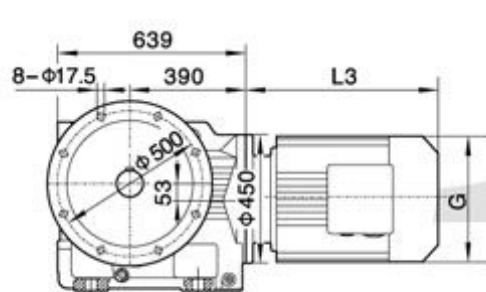


KAF127




KAT127

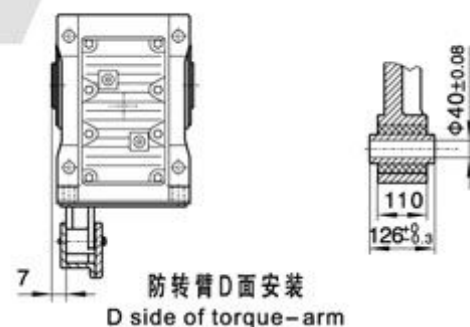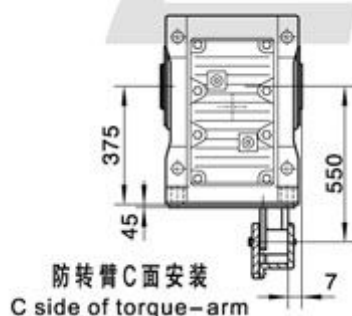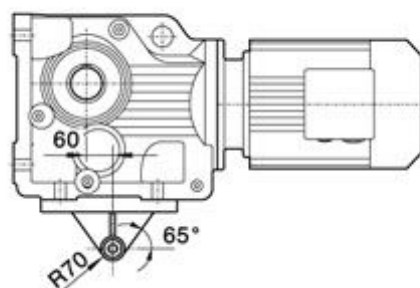


电机需方配或配特殊电机时
需加联接法兰



K..S127

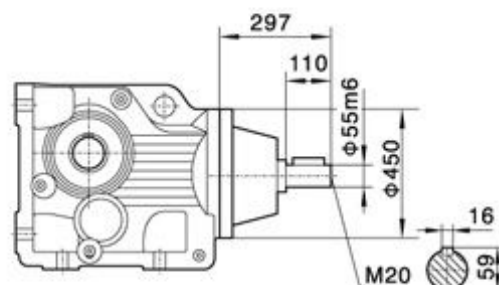

K..127R77(R87)

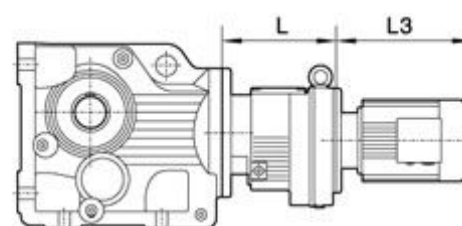

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to connected.

Y ₂ 电机机座号 Motor size	132M	160M	160L	180M	180L	200	225S	225M	250	280S	280M
功率/4P Power/(kW)	7.5	11	15	18.5	22	30	37	45	55	75	90
L3	424	567	602	583	616	654	674	696	775	847	847
G	275	330	330	380	380	420	470	470	510	580	580
L2	132	132	132	132	132	132	143	143	174	174	174


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB。

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.

K167


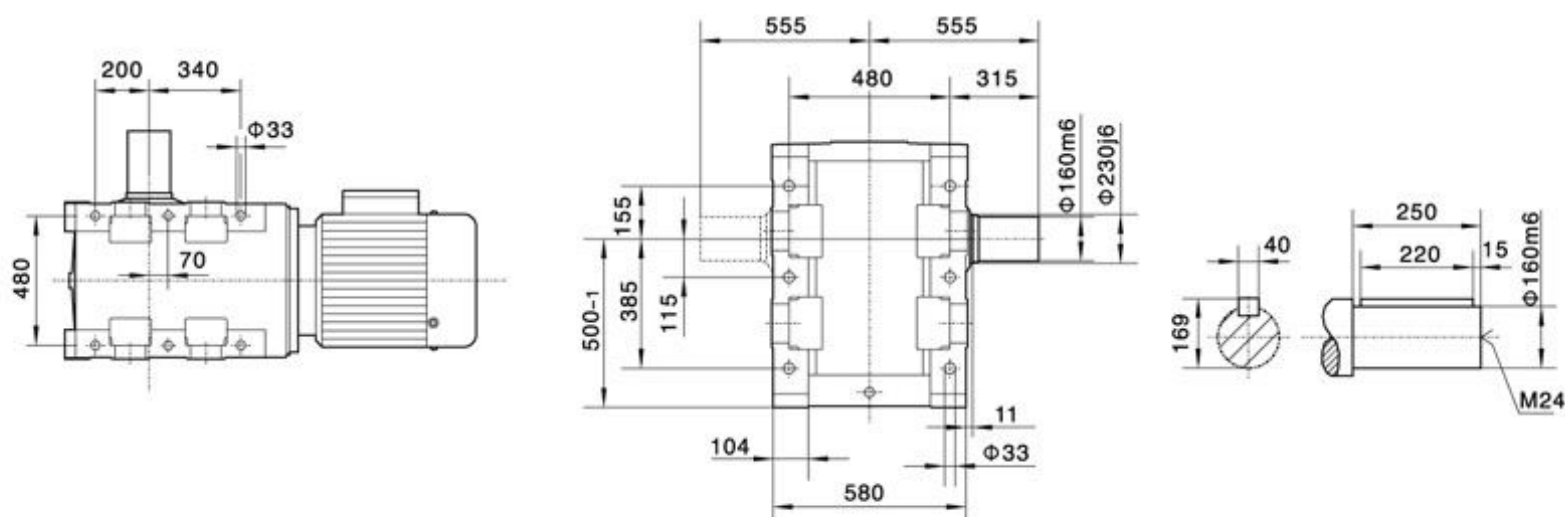


KA167

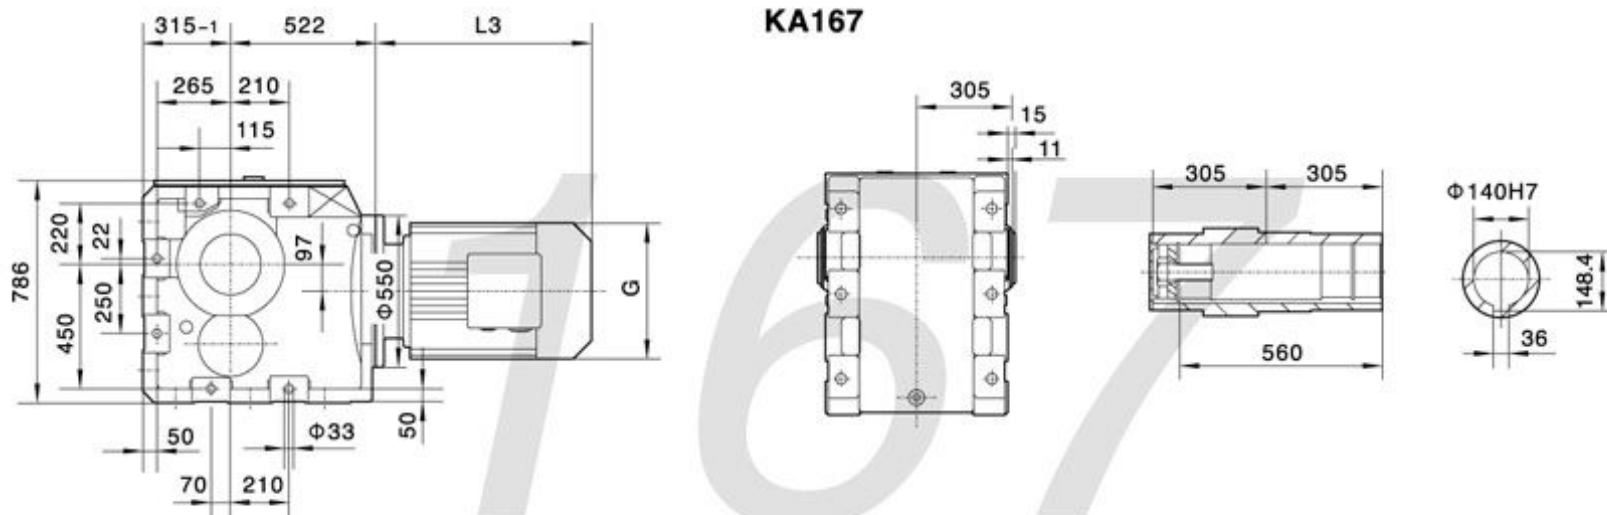


电机需方配或配特殊电机时
需加联接法兰

K..S167

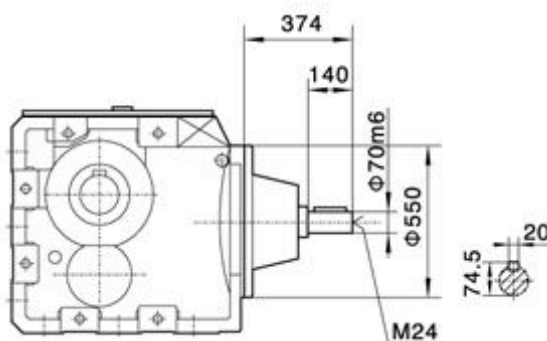

K..167R97(R107)

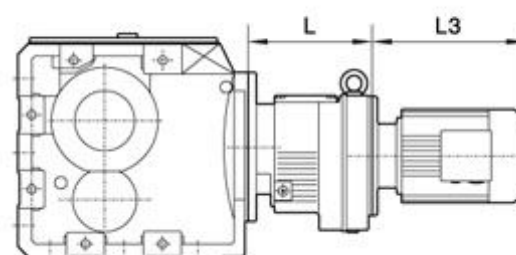

When equipping the user's motor or the special one, the flange is required to be connected.

注:其余尺寸见相对应结构形式


Note: For other values please refer to the opposited structure.

Y ₂ 电机机座号 Motor size	功率/4P Power/(kW)	L3	G	L2	160M	160L	180M	180L	200	225S	225M	250	280S	K..167R97		K..167R107	
														L	320	370	315L
					11	15	18.5	22	30	37	45	55	75	90	110	132	160
					330	330	380	380	420	470	470	510	580	580	645	645	645
					143	143	143	143	143	143	143	143	143	143	145	145	145


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

Note:1.The housings of KA、KF、KAF、KAZ are common parts.The mounting dimensions may consult each other. 2."K.."mean K、KA、KF、KAF、KAZ、KAB.

K187


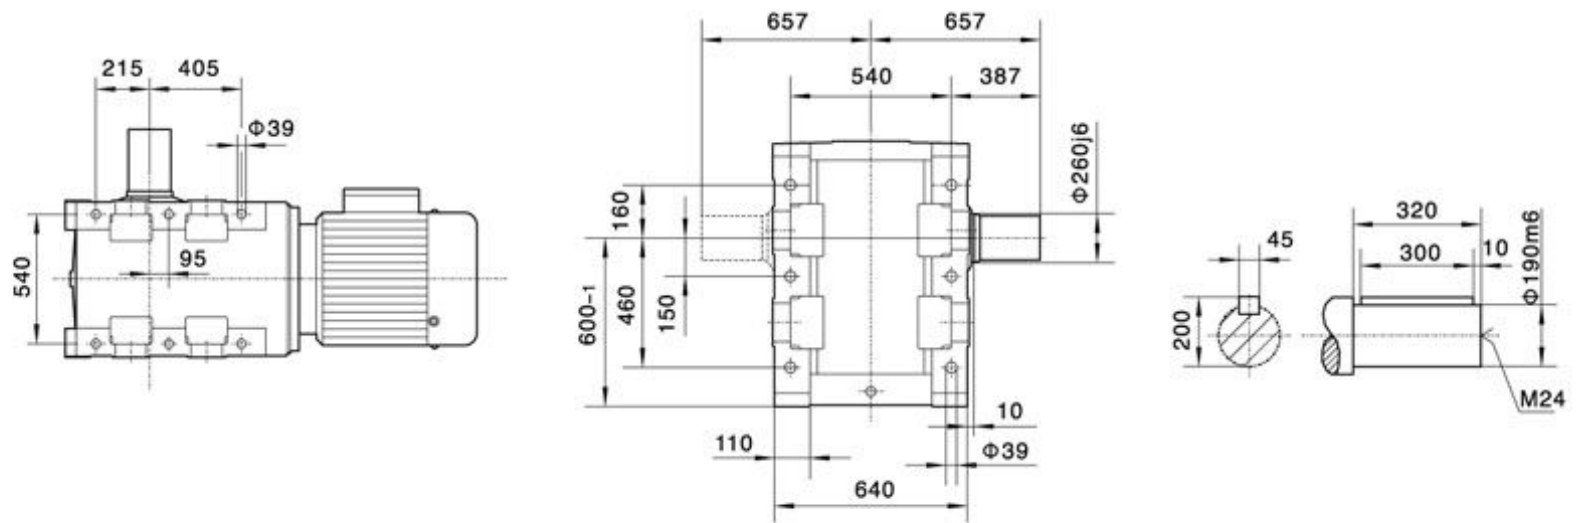


KA187

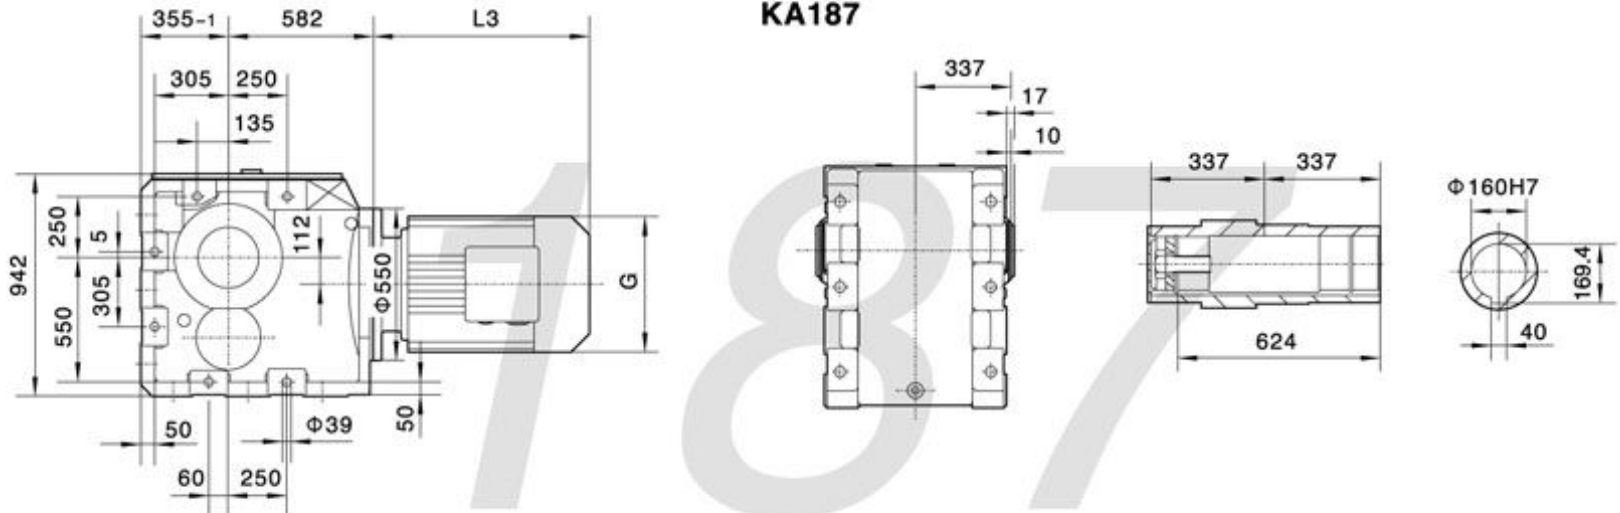


电机需方配或配特殊电机时
需加联接法兰

K..S187

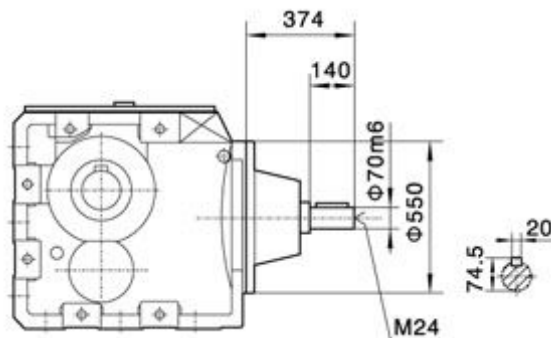

K..187R97(R107)

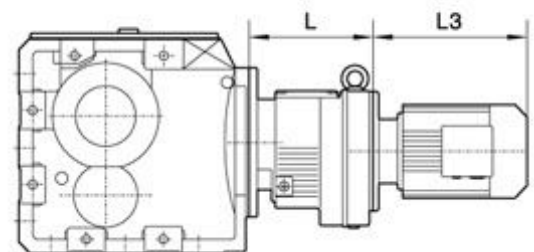

When equipping the user's motor or the special one, the flange is required to be connected.

注: 其余尺寸见相对应结构形式

Note: For other values please refer to the opposited structure.

	K..187R97									K..187R107			
	L									320			
Y2电机机座号 Motor size	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M	315L
功率/4P Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160 200
L3	567	602	635	666	642	669	691	770	828	879	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	143	143	143	143	143	143	143	143	143	143	145	145	145

注: 1. KA, KF, KAF, KAZ壳体为通用件, 安装尺寸均可相互参照。 2. "K.."表示K, KA, KF, KAF, KAZ, KAB.

Note: 1. The housings of KA, KF, KAF, KAZ are common parts. The mounting dimensions may consult each other. 2. "K.."mean K, KA, KF, KAF, KAZ, KAB.

关于格鲁夫>>产品介绍

PRODUCT INTRODUCTION

GELUFU 的市场定位是业界最佳传动设备供应商，日本产品的低成本，德国产品的稳定性，美国产品的先进性，是我们赶超的基准。只要我们持续地改进，就会无穷地逼近高质量、低成本和高效率的理想目标。

本公司部分系列可直接替换德国SEW公司，德国FLENDER公司，日本椿本TSUBAKI公司，意大利MOTOVARIO公司同型号产品。

The marketing positioning is getting the best suppliers of the transmission equipment industry.

Our aim is catch up with and surpass the low-cost products of Japan, the stability product of Germany, the advanced product of America. As long as we continue to improve ourselves, we will get close to the ideal aim of high quality, low-cost, high efficiency.

Part of our products can directly take the place of the same type products of SEW company, Germany Flender Company, Japanese Tsubaki Company and Italy Motovario Company.

K


S系列斜齿-蜗轮蜗杆减速机



R系列斜齿轮硬齿面减速机



K系列斜齿-螺旋锥齿轮减速机



F系列平行轴斜齿轮减速机



T系列螺旋锥齿轮转向箱



H、B系列标准工业齿轮箱



摆线针轮减速机



SWL、JW蜗轮丝杆升降机



塑料型材牵引机减速机



塑料小型挤出机减速机



P系列行星齿轮减速机



H系列/K系列组合齿轮减速机



格鲁夫机械设备制造有限公司

Gelufu Machinery Equipment Manufacturing Co. Ltd

地址 (ADD) : 河北 • 保定 邮编 (P.C) : 071000

电话 (TEL) : +86-312-6784766

传真 (FAX) : +86-312-6784733

<http://www.gelufu.com>

E-mail: china@gelufu.com

